


## DRR/HE

### THREE-WAY ROTARY VALVE PN10 AND HE25 EXTENSION

#### PRODUCT DATA

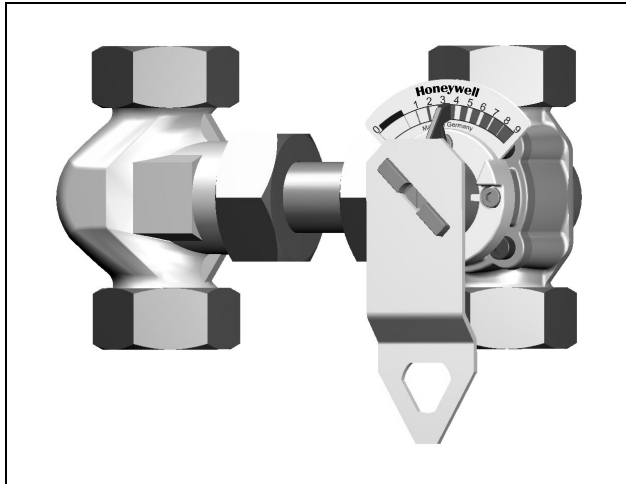

#### FEATURES

- Chrome-plated plug for long life-span
- Optimized characteristics for supply water temperature control
- All around changeable rotary plug
- Reliable and easy mounting of electrical actuators
- Wide range of flow rates in two housing sizes
- Compact design
- Use for manifolds by accessory HE25 Extension
- Thermal insulation package included

#### APPLICATION

The DRR25 Three-Way Rotary Valve provides water temperature control in heating and air-conditioning applications. These valves are designed for accurate mixing control of supply water temperature and return-flow temperature.

The sturdy construction and red brass material ensure long operating life and high reliability when used in combination with M6061/VMM and M7061/VRM actuators. The special inner form of the housing and the all-around changeable rotary plug allow the valve to be adapted to each possible application without having to drain the system.

The DRR25 Three-Way Rotary Valve is especially designed for applications with sludge deposition and for panel heating (e.g. underfloor and ceiling heating systems) with oxygen diffusion.

In combination with the distance-adjustable HE25 Extension, use in a wide range of pre-piped systems is possible.

#### SPECIFICATIONS

<b>Nominal static pressure</b>	10 bar; 1000 kPa
<b>Maximum pressure drop</b>	dependent on type (see table on page 3)
<b>Leakage rate</b>	< 1% of $k_{VS}$
<b>Ports</b>	External threads with cap nuts
<b>Angle of rotation</b>	90 °
<b>Packing</b>	Double O-ring lined
<b>Material body</b>	Red brass
<b>Material inner parts</b>	Chrome-plated cast iron
<b>Medium</b>	Heating water according to VDI 2035 (oxygen concentration less than 0.2 g/m <sup>3</sup> , pH 8...9.5)
<b>Water temperatures in the valve</b>	2...130 °C, non-condensing
<b>Weight</b>	dependent on type (see tables in section "Dimensions" on page 4)
<b>Flow characteristic</b>	equal percentage

## OPERATION


The valve controls a mixing water temperature by means of a rotating plug. The plug adjusts the water flow of two inputs with two control curves. The required flow water temperature is achieved by adding a proportion of return water to the boiler hot water. The DRR has special control characteristics for optimal control performance.

## SUITABLE ACTUATORS


torque [Nm]	OS no. 24 Vac float.	OS no. 230 Vac float.	OS no. 0/2...10V
20	M6061A1021 / VMM20-24	M6061L1027 / VMM20	M7061E1020 / VRM20

## MOUNTING

### Adjustments for Mixing Applications

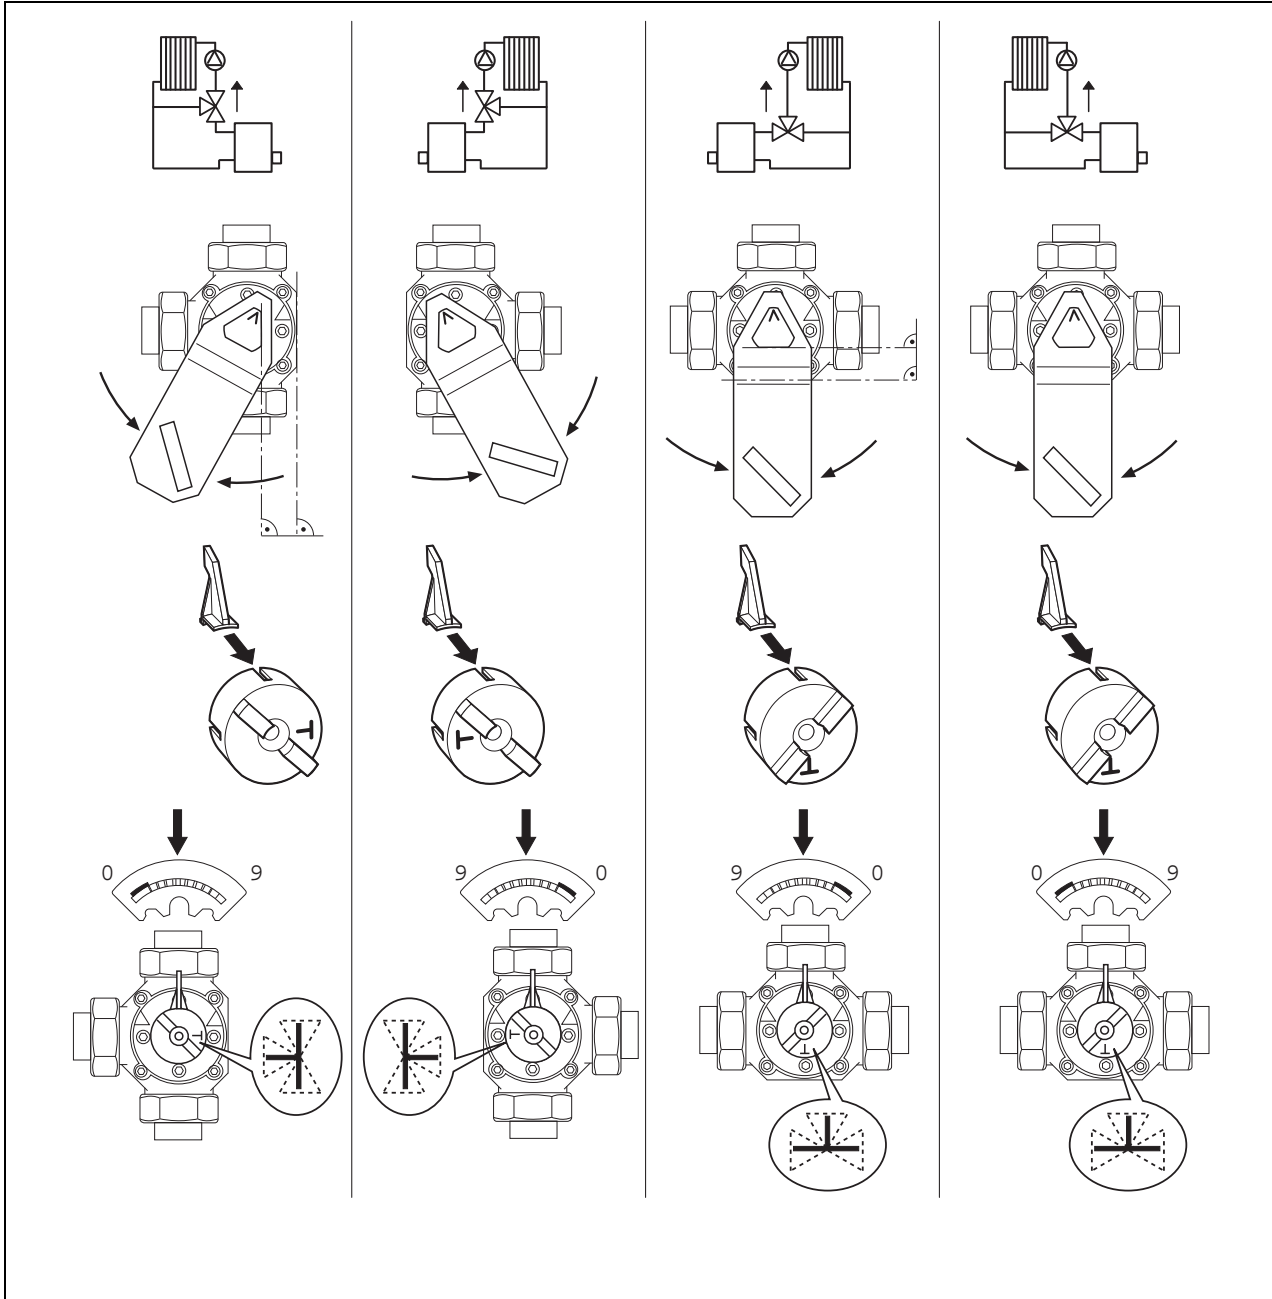

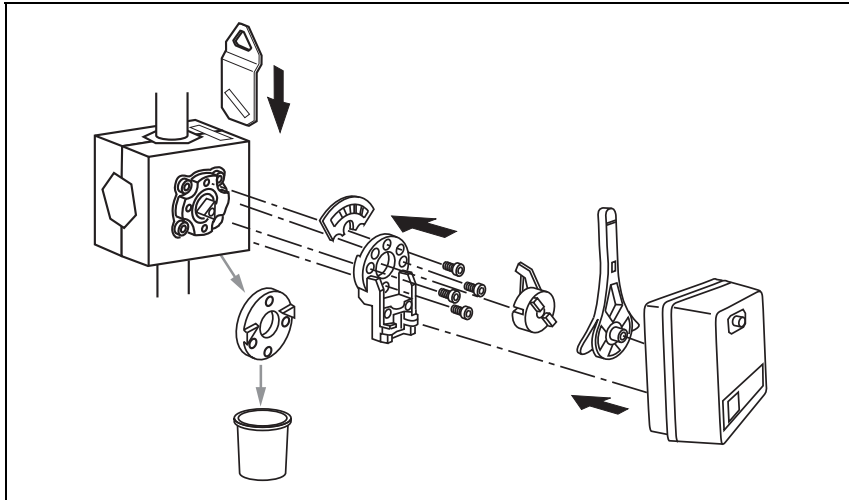


## Mounting the Actuator



## SPECIFICATION AND ORDER NUMBER PER DN

OS No.	DN	$k_{vs}$	heat flow	$\Delta p$	nom. torque	actuator	
		[m <sup>3</sup> /h]	[kW]	[kPa]	[Nm]	floating	modulating
DRU25-2.5	25	2.5	7-12	100	20	M6061A1021 / VMM20-24, M6061L1027 / VMM20	M7061E1020 / VRM20
DRU25-4.0	25	4.0	12-17	100	20		
DRU25-6.3	25	6.3	17-30	100	20		
DRU25-10	25	10.0	30-50	100	20		
DRU25-16	25	16.0	50-70	100	20		
HE25	25	-	-	-	-	-	-


## ACCESSORIES

connection set	description	DN	pipe size [mm]	weight [kg]	OS No.
	Welding sockets with gasket and cap nut	25	25	0.3	WTU25
	Soldering sockets with gasket and cap nut	25	18	0.21	LSU25-18
		25	22	0.21	LSU25-22
		25	28	0.21	LSU25-28
	Internal threaded sockets with gasket and cap nut	25	25	0.21	STU25

# DIMENSIONS


## DRR

type	DN	a	b	c	d	e	g	h	R	weight [kg]
DRR25-2.5	25	55	32	110	89	55	51	182	1 ½	2.48
DRR25-4.0	25	55	32	110	89	55	51	182	1 ½	2.48
DRR25-6.3	25	55	32	110	89	55	51	182	1 ½	2.50
DRR25-10	25	55	32	110	89	55	51	182	1 ½	2.53
DRR25-16	25	55	32	110	89	55	51	182	1 ½	2.51

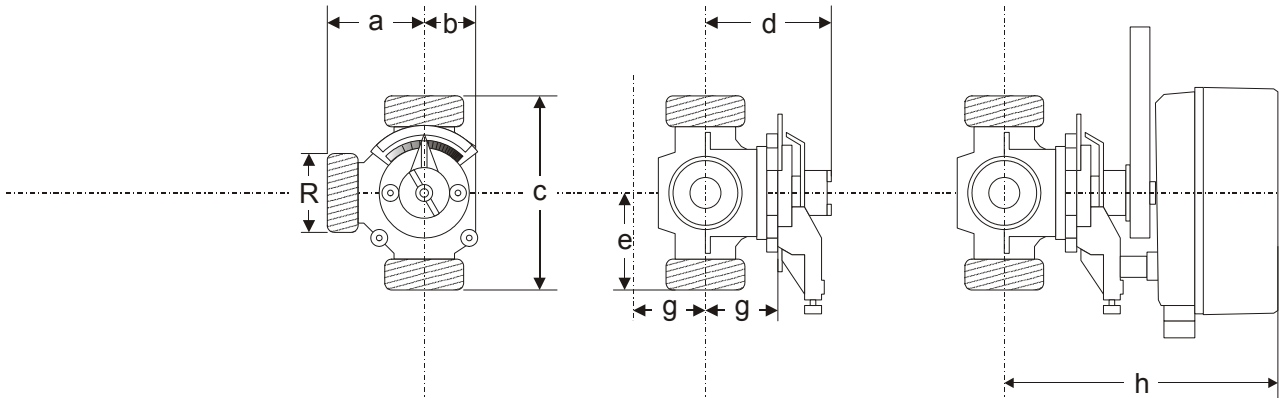


## HE

type	DN	a	b	e	f	g	R	weight [kg]
HE25	25	110	42	55	0-25	51	1 ½	1.7

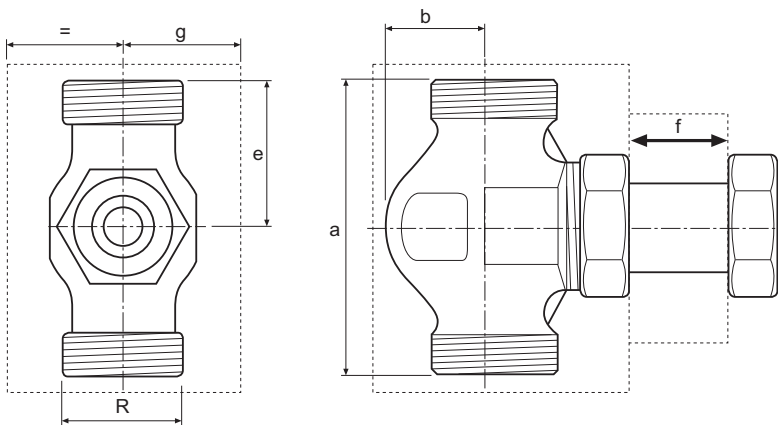


## HYDRAULIC FUNCTION


### Mixing

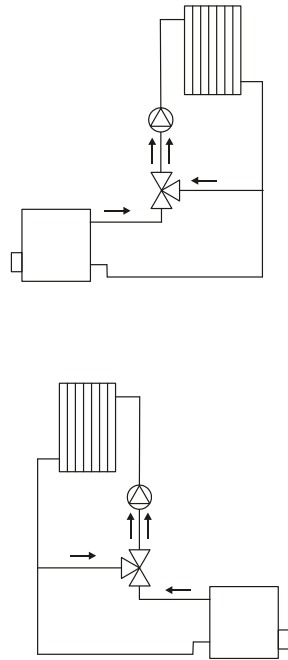

### Diverting

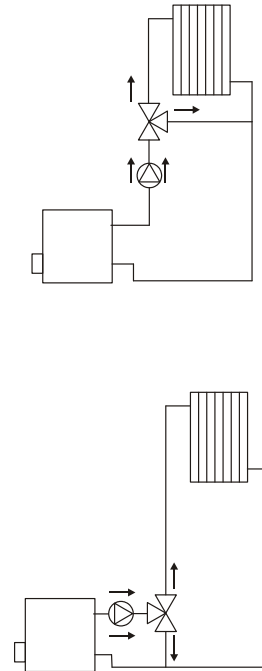

## Characteristics

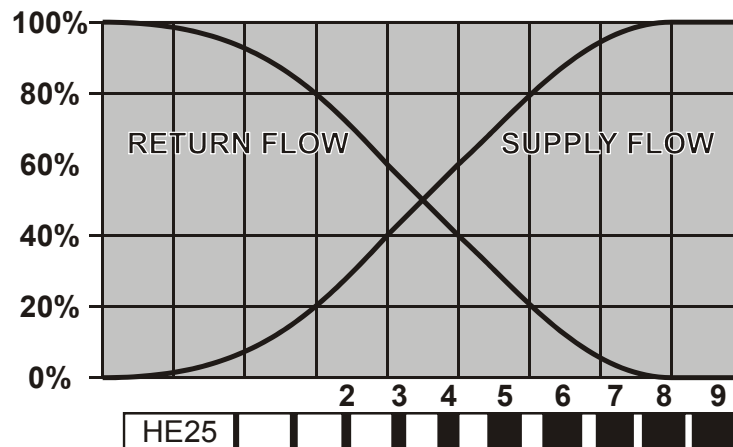


## Spare Parts

- O-ring (part no.: 07169 9535)

## VALVE DIMENSIONING

Honeywell Rotary Valves are employed mainly in hydraulic systems corresponding to the examples shown on page 2. The rotary valve can be set quite easily. In order to obtain good control characteristics, the pressure drop in the rotary valve should be about the same as the pressure drop in the "volume-variable" part of the pipe system, i.e. about 1.5...4.0 kPa or 15...40 mbar. The following dimensioning diagram is based on this interrelationship. The setting is obtained as follows:

1. Find heat flow  $\dot{Q}$  in the diagram.
2. Move vertically upwards to the intersection with the corresponding  $\Delta\theta$  line. On the vertical axis, the volume flow  $\dot{V}$  can be read off on the left in liters per hour.
3. Move horizontally to the right from the intersection with the  $\Delta\theta$  line into the shaded section (1.5-4.0 kPa). Here you will find the nominal rotary valve size to be selected.
4. From this intersection, go vertically downwards. Read off the pressure drop in the rotary valve in kPa (mbar).

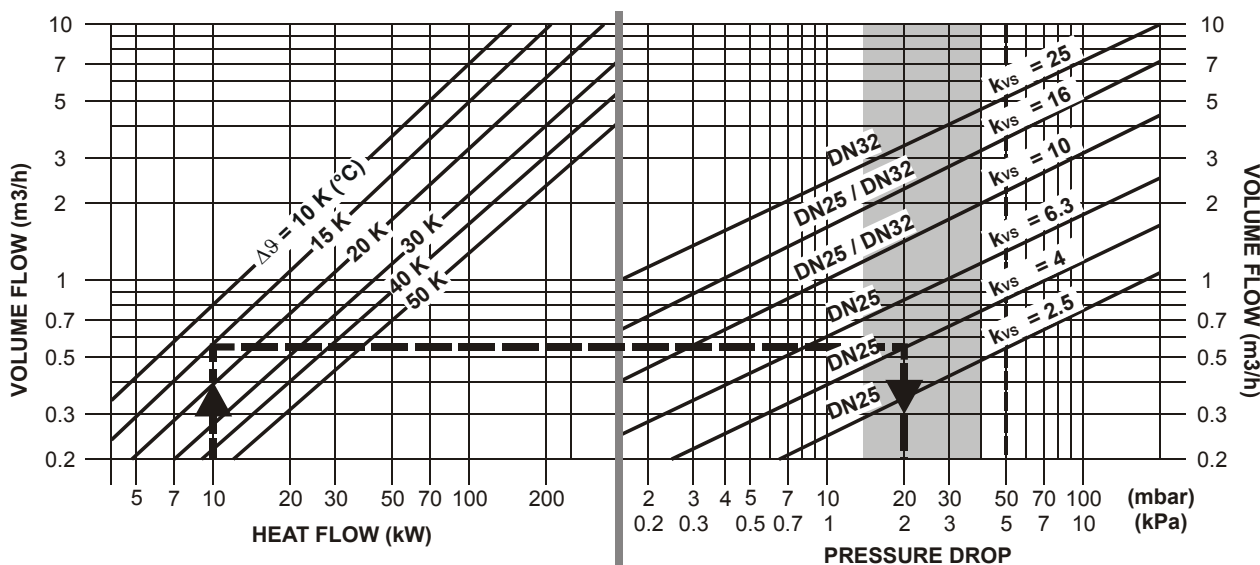

**Example** Given: Heat flow  $\dot{Q} = 10$  kW,  $\Delta\theta = 15$  K (e.g. 70/55 °C)  
 Required: Nominal rotary valve size and pressure drop

Volume flow:  $\dot{V} = \frac{\dot{Q}}{1.163 \cdot \Delta\theta} = \frac{10}{1.163 \cdot 15} = 0.57 \text{ m}^3/\text{h}$

Result: According to the diagram, the correct valve size is DN25,  $k_{vs} 4.0$  (DRR25-4.0). The pressure drop is 2 kPa or 20 mbar or 200 mm water column.

(Factor 1.163 contains the water density 1000 kg/m<sup>3</sup> and the specific heat capacity 4.19 kJ/kgK.  $\Delta\theta$  is the temperature difference between supply and return flow in Kelvin)

**Unit Conversion**      1 kW = 3600 kJ/h                      1 bar = 100 kPa  
    = 860 kcal/h                                      = 10 m water column  
 1000 kcal/h = 1.163 kW                      1 mbar = 10 mm water column

**Honeywell**

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Rolle, Z.A. La Pièce 16, Switzerland by its Authorized Representative:

**Automation and Control Solutions**

Honeywell GmbH  
 Böblinger Strasse 17  
 71101 Schönaich, Germany  
 Phone +49 (0) 7031 637 01  
 Fax +49 (0) 7031 637 740  
<http://ecc.emea.honeywell.com>