

VF00, VF01, VF10, VF20

IMMERSION AND AIR-DUCT TEMPERATURE SENSORS

PRODUCT DATA



GENERAL

These immersion and air-duct temperature sensors can be employed for hot and cold water as well as for air-duct applications in systems using Ni 1000, Pt 1000, NTC 10k, or NTC 20k temperature sensing elements.

The sensors with a stainless steel immersion well are also suitable for registering potable water temperature.

FEATURES

- Pt 1000, Ni 1000, NTC 10k, or NTC 20k temperature sensing element
- Wide sensing range
- High accuracy
- Choice of three different probe lengths: 65, 150, and 300 mm
- Models available with either IP54 or IP65 rating
- Bayonet ¼ turn cover screws for fast installation
- External mounting holes, no need to remove cover

SENSOR SPECIFICATION

Nominal value

| | |
|-------------------|------------------------|
| Pt 1000 / Ni 1000 | 1000 Ω at 0 °C (32 °F) |
| NTC 10k | 10 kΩ at 25 °C (77 °F) |
| NTC 20k | 20 kΩ at 25 °C (77 °F) |

Accuracy

| | |
|--------------------------|-------------------------|
| Pt 1000 (IEC751 Class B) | ±0.3 K at 0 °C (32 °F) |
| Ni 1000 | ±0.4 °C at 0 °C (32 °F) |
| NTC 10k, NTC 20k | ±0.2 K at 25 °C (77 °F) |

Sensitivity

| | |
|---------|--------------------------------------|
| Pt 1000 | ≈ 3.85 Ω / K |
| Ni 1000 | ≈ 6.18 Ω / K |
| NTC 10k | -440 Ω / K at 25 °C (non-linear) |
| NTC 20k | ≈ -934.5 Ω / K at 25 °C (non-linear) |

Time constant

< 30 s (using brass / stainless steel immersion well)

Electrical connection

| | |
|-------------|---|
| Connection | terminals for 2 x 1.5 mm ² cable |
| Cable gland | M16x1.5, UL 94-V2 |

Ambient limits (housing)

| | |
|---------------------|------------------------------|
| Storage temperature | -30...+70 °C (-22...+158 °F) |
| Humidity | 5...95% rh, non-condensing |

Safety (terminal box)

| | |
|------------------|-----------------------------|
| Protection class | IP54 / IP65 as per EN 60529 |
|------------------|-----------------------------|

Flame retardant

UL94-V0 rated plastic enclosure
T_{max} = 120 °C (enclosure)

Dimensions

See section "Dimensions" below.

IMMERSION WELL SPECIFICATION

| | |
|-----------------------|--|
| Operating temperature | -40 ... +150 °C |
| Humidity | 5...95% rh, non-condensing |
| Material | |
| WB | brass, nickel-plated tube: CuZn37-CW508L (Ms63) nipple: CuZn39Pb3 (Ms58) |
| WS | stainless steel tube: 1.4571 / 316Ti nipple: 1.4404 / 316L |

Sensor Models

| OS-no. | length mm (inch) L _{PROBE} | IP rating | sensor type | sensing temperature limits (probe) | immersion well (ordered separately) |
|-------------|-------------------------------------|-----------|-------------|------------------------------------|-------------------------------------|
| VF00-1B54NW | 150 (5.91) | IP54 | Pt 1000 | -40...+150 °C | WB150, WS150 |
| VF00-1B65NW | 150 (5.91) | IP65 | Pt 1000 | -40...+150 °C | WB150, WS150 |
| VF00-3B54NW | 300 (11.81) | IP54 | Pt 1000 | -40...+150 °C | WB300, WS300 |
| VF00-3B65NW | 300 (11.81) | IP65 | Pt 1000 | -40...+150 °C | WB300, WS300 |
| VF00-5B54NW | 65 (2.56) | IP54 | Pt 1000 | -40...+150 °C | WB50, WS50 |
| VF00-5B65NW | 65 (2.56) | IP65 | Pt 1000 | -40...+150 °C | WB50, WS50 |
| VF01-1B54NW | 150 (5.91) | IP54 | Ni 1000 | -40...+150 °C | WB150, WS150 |
| VF01-1B65NW | 150 (5.91) | IP65 | Ni 1000 | -40...+150 °C | WB150, WS150 |
| VF01-3B54NW | 300 (11.81) | IP54 | Ni 1000 | -40...+150 °C | WB300, WS300 |
| VF01-3B65NW | 300 (11.81) | IP65 | Ni 1000 | -40...+150 °C | WB300, WS300 |
| VF01-5B54NW | 65 (2.56) | IP54 | Ni 1000 | -40...+150 °C | WB50, WS50 |
| VF01-5B65NW | 65 (2.56) | IP65 | Ni 1000 | -40...+150 °C | WB50, WS50 |
| VF10-1B54NW | 150 (5.91) | IP54 | NTC 10k | -40...+110 °C | WB150, WS150 |
| VF10-1B65NW | 150 (5.91) | IP65 | NTC 10k | -40...+110 °C | WB150, WS150 |
| VF10-3B54NW | 300 (11.81) | IP54 | NTC 10k | -40...+110 °C | WB300, WS300 |
| VF10-3B65NW | 300 (11.81) | IP65 | NTC 10k | -40...+110 °C | WB300, WS300 |
| VF10-5B54NW | 65 (2.56) | IP54 | NTC 10k | -40...+110 °C | WB50, WS50 |
| VF10-5B65NW | 65 (2.56) | IP65 | NTC 10k | -40...+110 °C | WB50, WS50 |
| VF20-1B54NW | 150 (5.91) | IP54 | NTC 20k | -40...+150 °C | WB150, WS150 |
| VF20-1B65NW | 150 (5.91) | IP65 | NTC 20k | -40...+150 °C | WB150, WS150 |
| VF20-3B54NW | 300 (11.81) | IP54 | NTC 20k | -40...+150 °C | WB300, WS300 |
| VF20-3B65NW | 300 (11.81) | IP65 | NTC 20k | -40...+150 °C | WB300, WS300 |
| VF20-5B54NW | 65 (2.56) | IP54 | NTC 20k | -40...+150 °C | WB50, WS50 |
| VF20-5B65NW | 65 (2.56) | IP65 | NTC 20k | -40...+150 °C | WB50, WS50 |

Immersion Well Models (sold separately)

| OS-no. | material | length mm (inch) L _{WELL} | connection | P _{max} | max. flow speed* |
|--------|----------------------|------------------------------------|-------------------|------------------|------------------|
| WS50 | stainless steel | 50 (1.97) | R1/2" / ISO, PN25 | 25 bar | 30 m/s |
| WB50 | brass, nickel-plated | 50 (1.97) | | 13 bar | 26 m/s |
| WS150 | stainless steel | 135 (5.31) | | 25 bar | 7.5 m/s |
| WB150 | brass, nickel-plated | 135 (5.31) | | 13 bar | 5 m/s |
| WS300 | stainless steel | 285 (11.22) | | 25 bar | 2 m/s |
| WB300 | brass, nickel-plated | 285 (11.22) | | 13 bar | 1.2 m/s |

*At flow speeds above 1 m/s, the temperature profile in the water is flat, thus reducing the required immersion depth.

Flanges (compatible with all devices; sold separately)

| OS-no. | description |
|--------|--|
| LF-MF | Mounting flange for air-duct use, BULK – 10 pieces |

DIMENSIONS


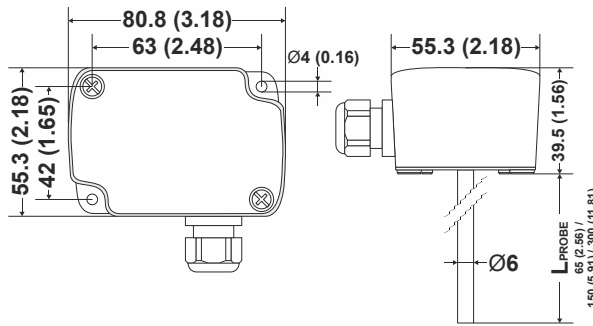


Fig. 1. Housing, dimensions in mm (inches)

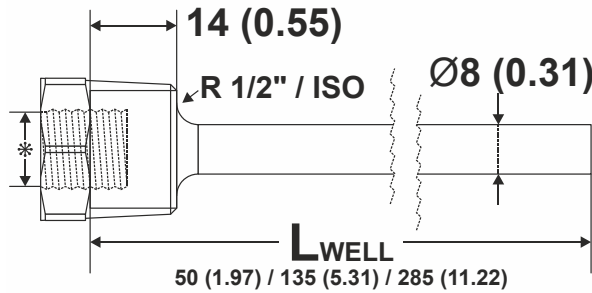

* THREAD FOR CABLE GLAND M12x1.5
ACCESSIBLE AFTER REMOVING SPRING

Fig. 2. Immersion well, dimensions in mm (inches)

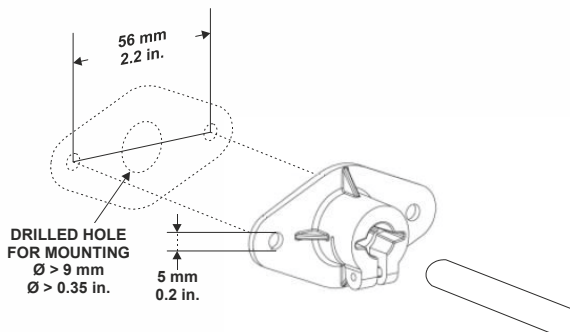


Fig. 3. Flange mounting on duct (mm, inches)

INSTALLATION

| wiring run | max. length |
|----------------------|----------------|
| Sensor to controller | 200 m (660 ft) |

Offset due to wire resistance per 10 m of distance from sensor to controller, when using the VF00 (Pt 1000):

| type of wire | temperature offset Pt 1000 |
|-----------------------------|----------------------------|
| 0.5 mm ² (AWG20) | 0.18 °C (0.324 °F) |
| 1.0 mm ² (AWG17) | 0.09 °C (0.162 °F) |
| 1.5 mm ² (AWG15) | 0.06 °C (0.108 °F) |

NOTE: Use shielded wiring in areas with high EMI.
Keep 15 cm (5.9") minimum distance between sensor lines and 230 Vac power lines.

ELECTRICAL CONNECTION

The wiring of the temperature sensor must be in accordance with the overall wiring circuit diagram.
The terminals are not polarized. Thus, connecting the wires in reverse will not result in any malfunction.

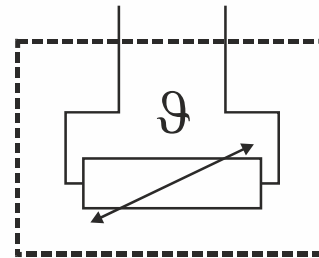


Fig. 4. VF00, VF01, VF10, VF20 wiring

Home and Building Technologies

Honeywell GmbH
Böblinger Strasse 17
71101 Schönaich, Germany
Phone +49 (0) 7031 637 01
Fax +49 (0) 7031 637 740
<http://ecc.emea.honeywell.com>