



# resideo

## Braukmann BA195 miniBA

### Backflow Preventer

#### APPLICATION

Backflow preventers of this type are suitable for the protection of drinking water systems against back pressure, backflow and back syphonage.

They are used mainly for OEM-applications, but can also be used for commercial and industrial purposes within the scope of their specification.

Fluids up to and including liquid category 4 to EN 1717 are protected.

#### APPROVALS

- DVGW
- SVGW
- NF
- BELGAQUA
- WRAS
- KIWA

#### SPECIAL FEATURES

- Optimal protection of the drinking water supply system
- Integrated inlet strainer
- Inlet check valve and discharge valve are combined in one cartridge
- Minimal maintenance required, because the valve cartridge is completely replaceable
- Optimized design prevents water stagnation in normal operation
- Compact construction
- Low pressure loss and high flow rate
- ACS certified
- All materials are KTW approved
- Approved by TÜV LGA for low noise, Group 1 without limitations




**kiwa**

#### TECHNICAL DATA

<b>Media</b>	
Medium:	Drinking water
<b>Connections/Sizes</b>	
Connection size:	1/2"
Nominal size diameter:	3/8"
Discharge pipe connection:	DN50
<b>Pressure values</b>	
Inlet pressure:	1.5 bar - 10 bar
<b>Operating temperatures</b>	
Max. operating temperature medium:	65 °C (WRAS 60 °C)
<b>Specifications</b>	
Installation position:	Horizontal with discharge valve downwards

## CONSTRUCTION

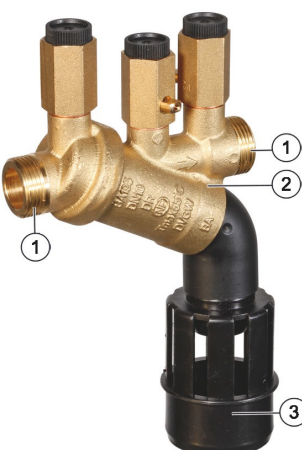Overview	Components	Materials
	<b>1</b> Inlet/Outlet check valves	High-quality synthetic material or red bronze
	<b>2</b> Housing	Dezincification-resistant brass
	<b>3</b> Discharge connection	High-quality synthetic material
	<b>Not depicted components:</b>	
	Integral strainer, mesh size approx. 0.5 mm	Stainless steel
	Valve cartridge with integral check valve and discharge valve	High-quality synthetic material
	Check ball valves	

## METHOD OF OPERATION

BA type backflow preventers are divided into three pressure zones. The pressure in zone ① is higher than in zone ②, which in turn is higher than in zone ③. A discharge valve is connected to zone ② which opens at the latest when the differential pressure between zones ① and ② drops to 0.14 bar. The water from zone ② discharges to atmosphere, both check valves close and therefore separate zone ② from zone ① and ③. In this way the danger of back pressure or back syphonage into the supply network is prevented. The pipework connection is interrupted and the drinking water network is protected.

## TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *

\*non condensing

## INSTALLATION GUIDELINES

### Setup requirements

- Install shut-off valves before and after backflow preventer
- Install in horizontal pipework with the discharge valve downwards
- Ensure good access
- If a fine filter is not installed in the drinking water system, the installation of a filter with a mesh width of 100 µm is recommended in front of the backflow preventer
- In the case of fluctuating pre-pressure or an input pressure over 10 bar, we recommend the insertion of a pressure regulator in front of the backflow preventer
- Do not install in places where flooding can occur
- The installation environment should be protected against frost and ventilated well
- Install discharge pipework which has adequate capacity
- Thoroughly flush pipework
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection
- These armatures need to be maintained regularly

**Installation Example**

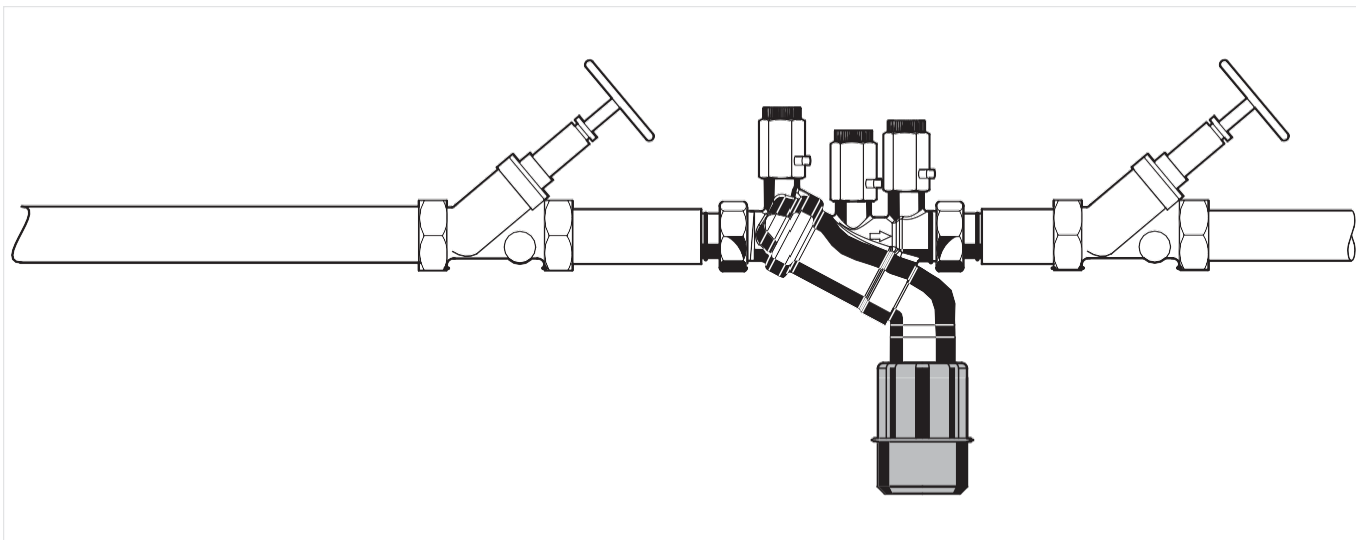


Fig. 1 Standard installation example for the backflow preventer

**TECHNICAL CHARACTERISTICS**

**Pressure drop characteristics**


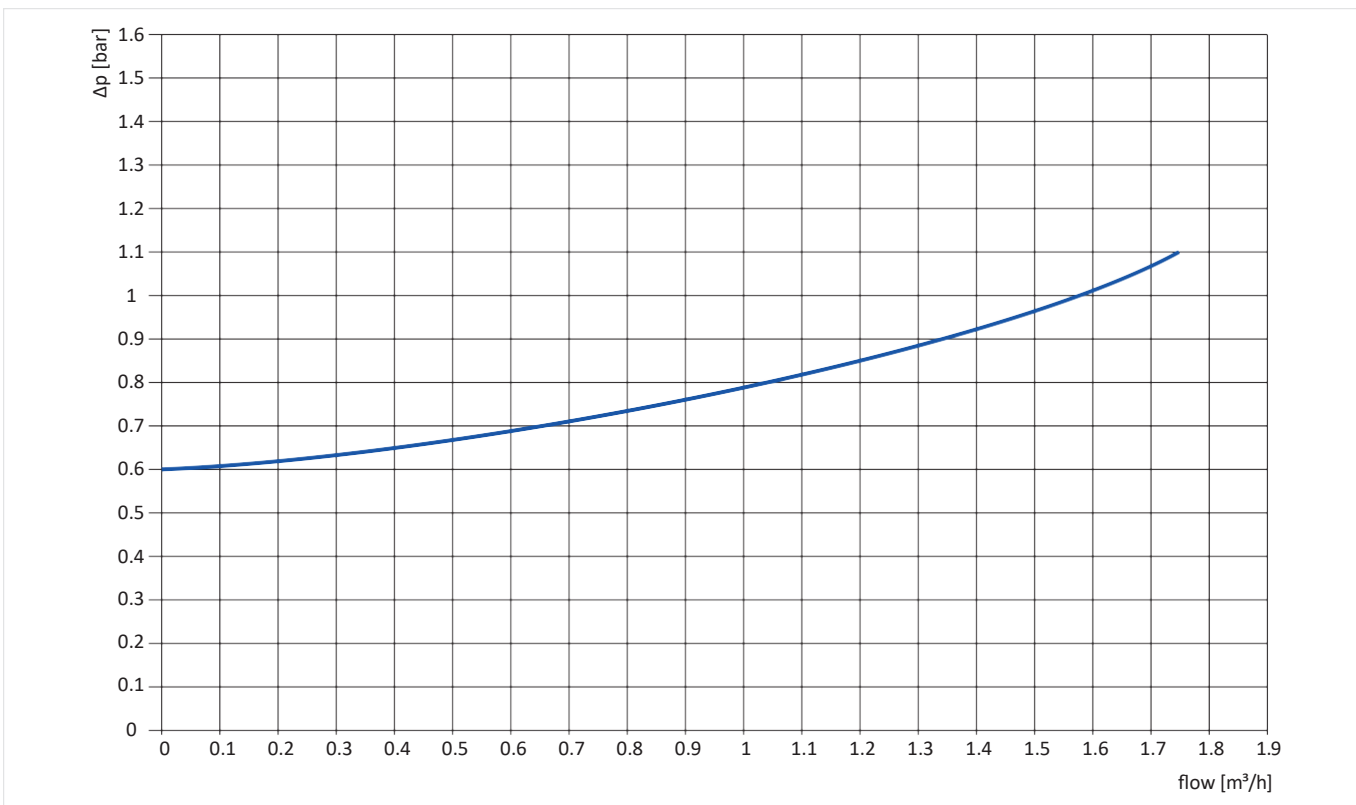


Fig. 2 Pressure drop within the valve in dependency of the flow rate and the used connection size

## DIMENSIONS

### Overview

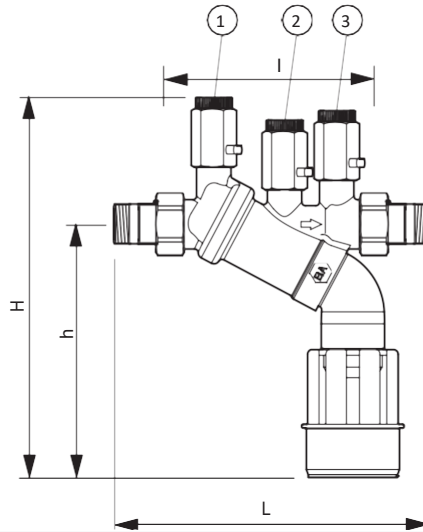

Parameter		Values
Connection size:	R	1/2"
Nominal size diameter:	R	3/8"
Weight:	kg	0.47
Dimensions:	L	173
	I	113
	H	204
	h	136
DVGW registration number:		NW-6305BS0408
NF Approval number:		08 ACC LY 319

Note: All dimensions in mm unless stated otherwise.

Note: 1 to 3 see chapter Method of operation

## ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.



### Options

The backflow preventer is available in the following sizes: 3/8" and 1/2".

- standard
- not available


		BA195-3/8E	BA195-1/2A
Connection type:	Standard version with connection thread 3/4" on housing	•	-
	Standard version with tailpieces connection size 1/2"	-	•

**Accessories**

	Description	Dimension	Part No.
	<b>TKA295 Test kit</b> Analogue pressure measuring device with differential pressure display. With case and accessories, ideal for inspection and maintenance of backflow preventer type BA.		
			TKA295
	<b>WS195 Maintenance Set</b> Maintenance Set for backflow preventers for use with Test kit TK295 resp. TKA295		
			WS195

**Spare Parts**

Backflow preventer BA195, from 2006 onwards

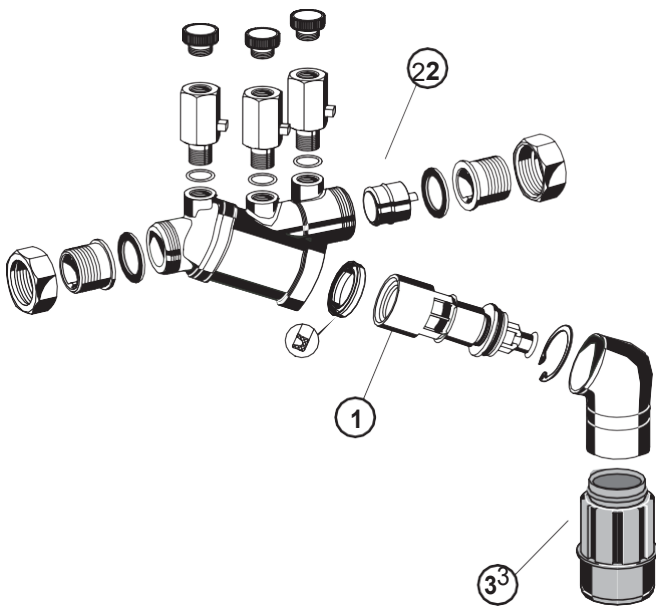Overview	Description	Dimension	Part No.
	<b>1 Cartridge insert complete</b>		
		3/8"	KE195
	<b>2 Check valve insert</b>		
		3/8"	2110200
	<b>3 Discharge connection</b>		
			AT295STN