

Braukmann BA295CS

Backflow Preventer

Compact construction with integrated shut-off valves

APPLICATION

Backflow preventers of this type are suitable for the protection of drinking water systems against back pressure, backflow and back siphonage.

They can be used for residential buildings, industrial and commercial purposes within the scope of their specification. Fluids up to and including liquid category 4 to EN 1717 are protected.

SPECIAL FEATURES


- Approved according to EN 12729 except BA295CS-1B
- Optimal protection of the drinking water supply system
- Integrated inlet strainer
- Integrated shut-off valves on inlet and outlet
- Inlet check valve and discharge valve are combined in one cartridge
- Low maintenance effort - cartridge insert and valve insert are completely replaceable
- Optimized design prevents water stagnation in normal operation
- Compact construction
- Easy access to all internal components
- Low pressure loss and high flow rate
- All materials are UBA conform



TECHNICAL DATA

Media	
Medium:	Drinking water
Connections/Sizes	
Connection size:	1/2" - 2"
Discharge pipe connection:	DN50 for connection sizes 1/2" - 1 1/4" DN70 for connection sizes 1 1/2" - 2"
Pressure values	
Inlet pressure:	1.5 bar - 10.0 bar
Operating temperatures	
Max. operating temperature medium:	65 °C
Specifications	
Installation position:	Horizontal with discharge valve downwards

CONSTRUCTION

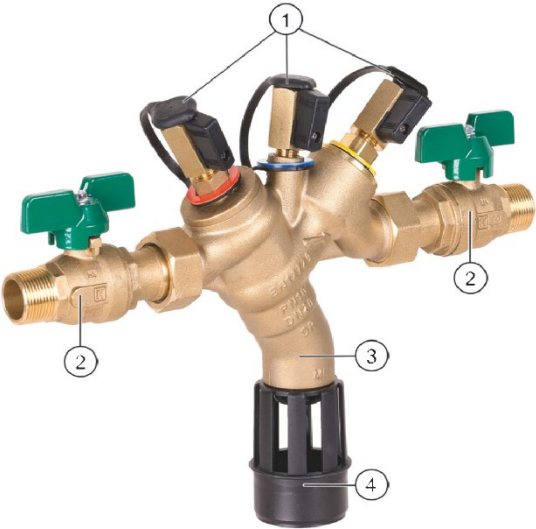Overview	Components	Materials	
	1	Three ball valves for the connection of a differential pressure gauge	Brass
	2	Inlet and outlet shut-off valve	Brass
	3	Housing	Dezincification-resistant brass
	4	Discharge connection	High-grade synthetic material
Not depicted components:			
		Integral strainer, mesh size approx. 200 µm	Stainless steel
		Valve cartridge with integral check valve and discharge valve	High-grade synthetic material
		Outlet check valve	High-grade synthetic material
		Sealing elements	Elastomer materials suitable for drinking water

METHOD OF OPERATION

BA type backflow preventers are divided into three pressure zones. The pressure in zone ① is higher than in zone ②, which in turn is higher than in zone ③. A discharge valve is connected to zone ② which opens at the latest when the differential pressure between zones ① and ② drops to 0.14 bar. The water from zone ② discharges to atmosphere, both check valves close and therefore separate zone ② from zone ① and ③. In this way the danger of back pressure or back syphonage into the supply network is prevented. The pipework connection is interrupted and the drinking water network is protected.

TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *

*non condensing

INSTALLATION GUIDELINES

Setup requirements

- Install in horizontal pipework with the discharge valve downwards
- Ensure good access
 - Simplifies maintenance and inspection
- If a fine filter is not installed in the drinking water system, the installation of a filter with a mesh width of 100 µm is recommended in front of the backflow preventer
- In case of inlet-pressure fluctuations or a inlet pressure over 10 bar, we recommend to install a pressure reducing valve upstream of the backflow preventer
- Do not install in places where flooding can occur
- The installation environment should be protected against frost and ventilated well
- Install discharge pipework which has adequate capacity
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection
- These armatures need to be maintained regularly

Installation Example


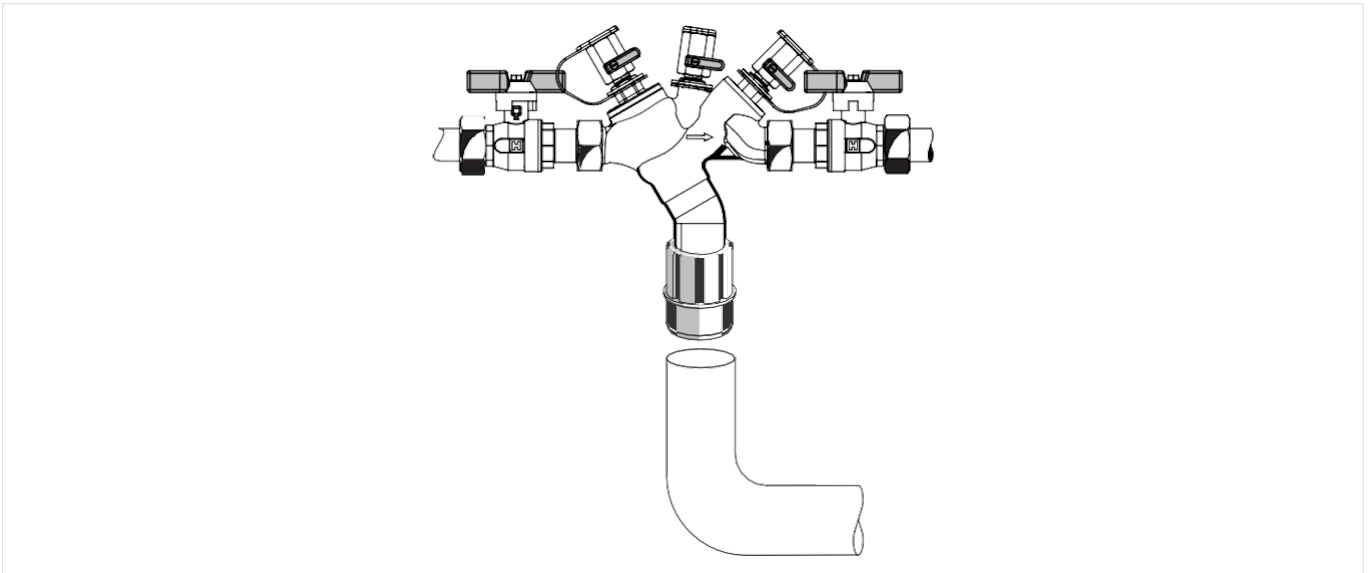


Fig. 1 Standard installation example for the backflow preventer


TECHNICAL CHARACTERISTICS

Pressure drop characteristics

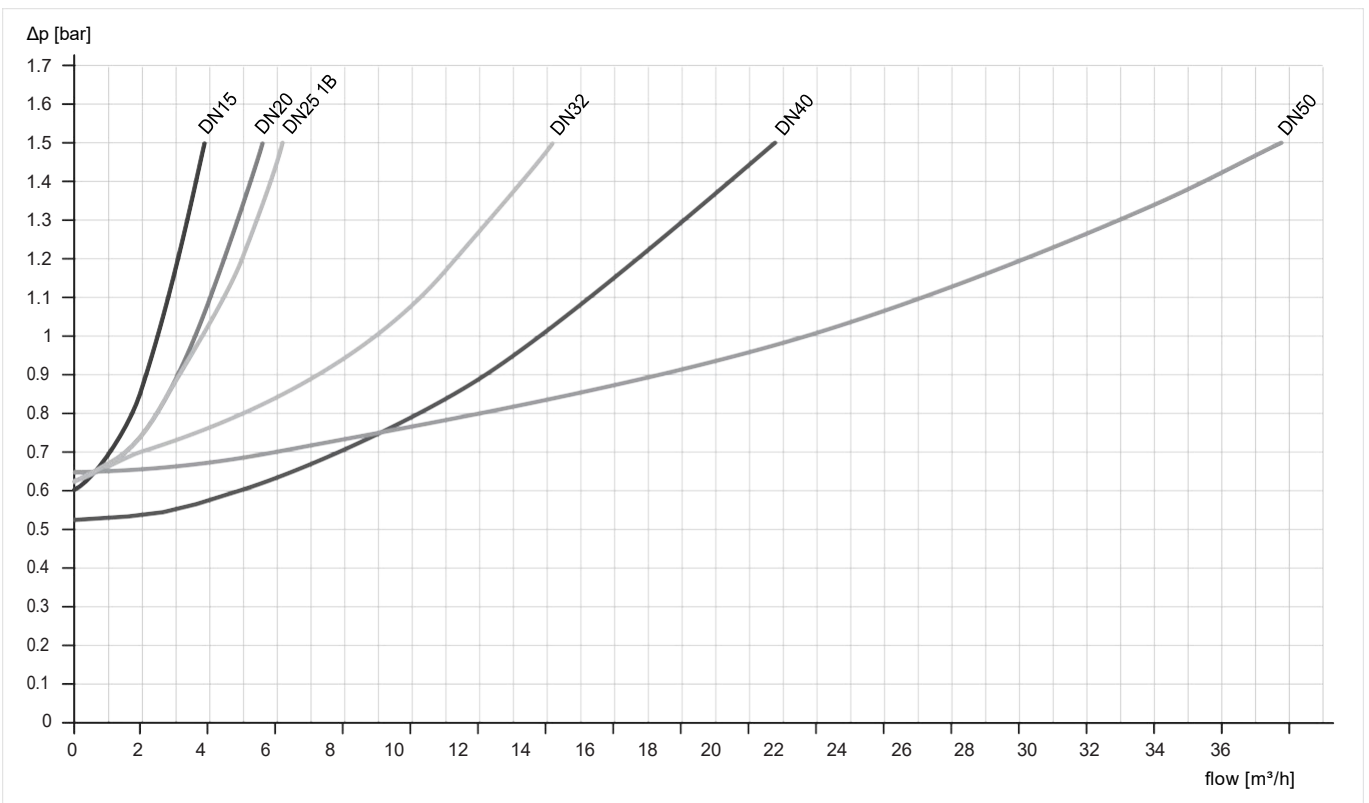

DIMENSIONS

Overview

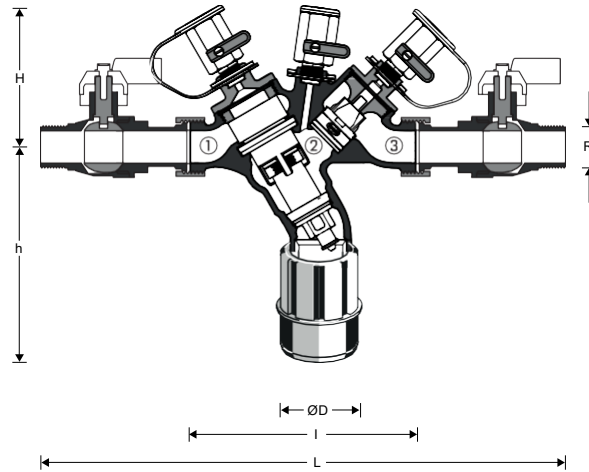

Parameter		Values					
Connection size:	R	1/2"	3/4"	1", B-version	1 1/4"	1 1/2"	2"
Nominal size:	DN	50	50	50	50	70	70
Weight:	kg	2.1	2.3	3.0	5.2	7.9	10.5
Dimensions:	L	312	326	353	410	481	530
	l	135	140	146	180	226	231
	H	88	88	88	103	126	126
	h	143	143	143	174	217	217

Note: All dimensions in mm unless stated otherwise.

Note: 1 to 3 see chapter Method of operation

ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

Options

The backflow preventer is available in the following sizes: 1/2", 3/4", 1", 1 1/4" 1 1/2" and 2".


- standard
- not available

		BA295CS-...A	BA295CS-1B
Connection type:	Version with shut-off valve, threaded connections 1/2", 3/4", 1 1/4", 1 1/2", 2"	•	-
	Version with shut-off valve, threaded connections 1"	-	•

Note: ... = space holder for connection size


Note: Ordering number example for 1" and type A valve: BA295CS-1A

Accessories

	Description	Dimension	Part No.
	TKA295 Test kit Analogue pressure measuring device with differential pressure display. With case and accessories, ideal for inspection and maintenance of backflow preventer type BA.		
			TKA295

Spare Parts

Backflow preventer BA295CS

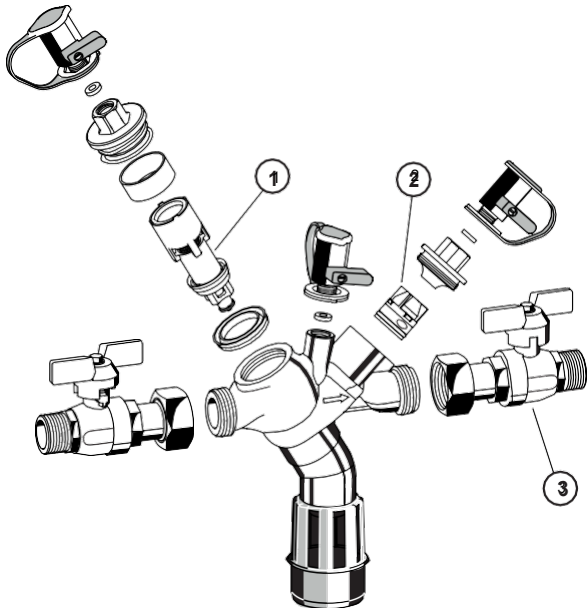Overview	Description	Dimension	Part No.
	1 Cartridge insert complete		
		1/2", 3/4", 1"	0904141
		1 1/4"	0904142
		1 1/2", 2"	0904143
	2 Check valve		
		1/2", 3/4", 1"	0904144
		1 1/4"	0904146
		1 1/2"	0904147
		2"	0904148
	3 Shut-off valve		
		1/2"	2192900
		3/4"	2193100
		1"	2193200
		1 1/4"	2193300
		1 1/2"	2193400
	2"	2193500	