



Braukmann RV284

Controllable anti-pollution check valve EA type

APPLICATION

Check valves of this type are for use as an independent means of preventing reverse water flow.

They can also be used for industrial, commercial and similar systems where back pressure, backflow and back syphonage must be prevented.

The classifications of appliances to meet these requirements are specified in EN 1717.

SPECIAL FEATURES

- Universal application
- Easy installation
- Low pressure loss
- Quiet operation
- Create no shock pressure loadings



TECHNICAL DATA

Media	
Medium:	Drinking water
Connections/Sizes	
Connection size:	With internal thread 1/2" - 2"
Pressure values	
Max. inlet pressure:	25 bar
Opening pressure:	0.05 bar
Operating temperatures	
Max. operating temperature medium:	65 °C accord. DIN EN 13959 (short term operation up to 90 °C)
Specifications	
Liquid category:	2 (no hazardous materials)

CONSTRUCTION

Overview	Components	Materials
	1 Housing	Dezincification-resistant brass
	2 Test plug with seal ring	High-quality synthetic material
	Not depicted components:	
	Seal ring	EPDM
	Check valve insert (DVGW-certified)	High-grade synthetic material

METHOD OF OPERATION

Spring loaded check valves have a moving seal disc which is lifted off the seat by a greater or lesser amount depending on the flow rate through the valve. If the flow falls towards zero, then the spring pushes the disc back onto the seat and seals the waterway.

To ensure continuing correct function it is recommended that check valves be regularly checked and maintained (as specified in EN 1717).

TRANSPORTATION AND STORAGE


Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5 °C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity:	85 % *

*non condensing

Installation Example

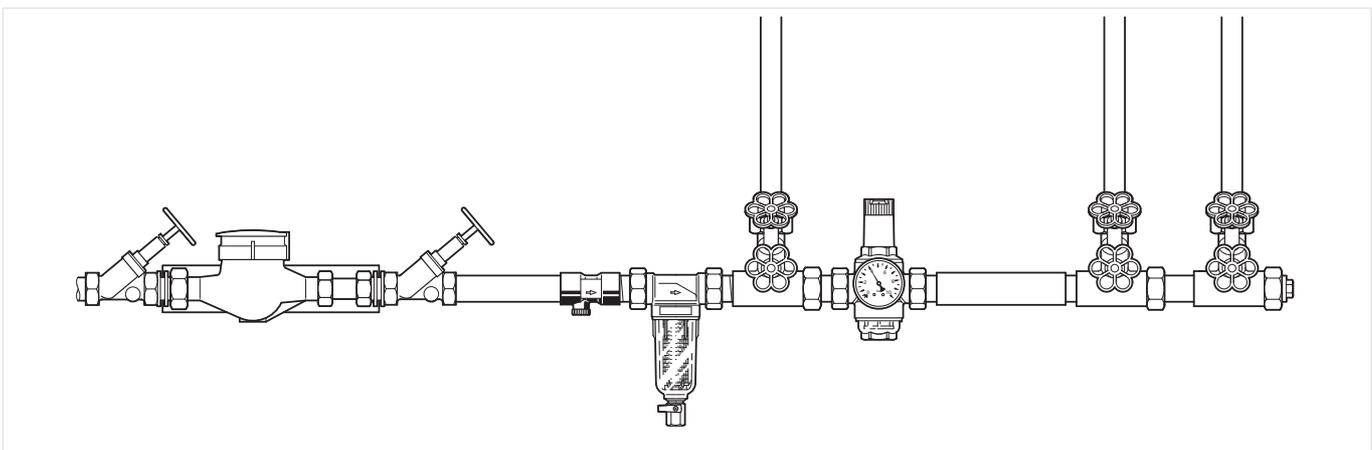

INSTALLATION GUIDELINES

Setup requirements


- Install in horizontal pipework with test and drain plug downwards
 - This position is best for draining
- Install shut-off valves
 - Shut-off valves provide optimal serviceability
- Ensure good access
 - Simplifies maintenance and inspection
- Install right after water meter if applicable
 - Protects against backflow from water systems

TECHNICAL CHARACTERISTICS

kvs-Values


Connection sizes:	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
k _{VS} -value (m ³ /h):	4.1	8.8	13.5	26.0	39.0	65.0

Pressure drop characteristics

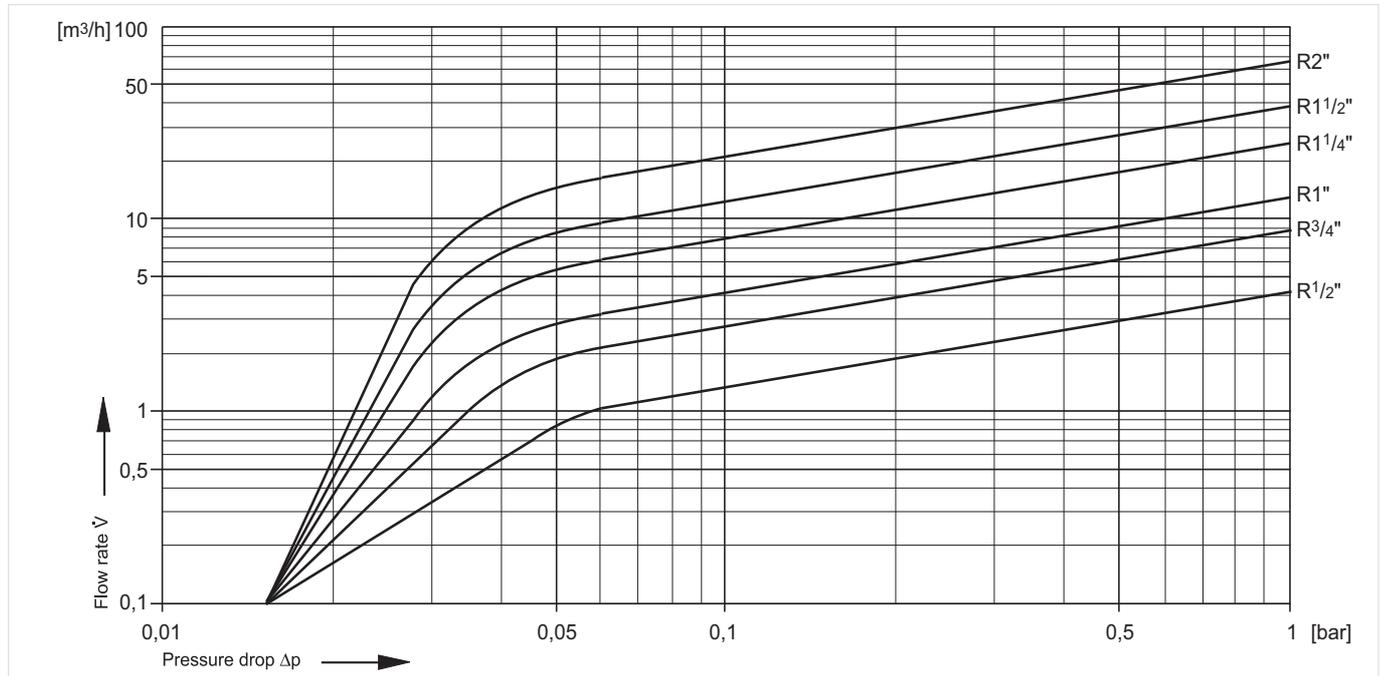

DIMENSIONS

Overview

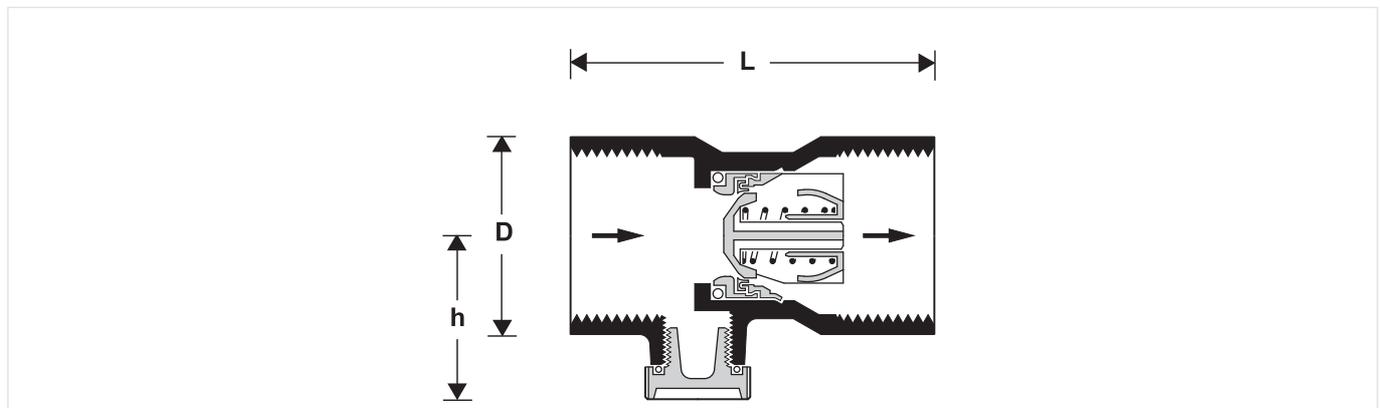

Parameter		Values						
Connection size:	Rp	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	
Test and drain plug:	R	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"	
Weight:	kg	0.15	0.18	0.22	0.41	0.47	0.80	
Dimensions:	L	60	65	70	90	90	105	
	H	55	60	65	65	65	80	
	D	30	35	40	60	60	80	
Nominal flow rate at Δp = 0.15 bar:	m ³ /h	1.6	3.4	5.4	10.2	15.1	26.1	

Note: All dimensions in mm unless stated otherwise.

ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

Options

The valve is available in the following sizes: 1/2", 3/4", 1", 1 1/4" 1 1/2" and 2".

- standard
- not available

Connection type:	Internal thread	RV284-...A
		•

Note: ... = space holder for connection size

Note: Ordering number example for 1": RV284-1A

Spare Parts

Inlet check valve RV284, from 1997 onwards

Overview	Description	Dimension	Part No.
	1 Check valve cartridge		
		1/2"	2166200
		3/4"	2110200
		1"	2164400
	2 Blanking plug with O-ring R1/4" (5 pcs.)		
		1/4"	S06K-1/4
	3 Union seal washer (10 pcs.)		
		3/4"	0901444
		1"	0901445



Manufactured for
and on behalf of
Pittway Sàrl, Z.A., La Pièce 4,
1180 Rolle, Switzerland
by its authorised representative
Ademco 1 GmbH

For more information
homecomfort.resideo.com/europe

Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY

Phone: +49 6261 810
Fax: +49 6261 81309