



LAS-SD-Z SeaHawk Spot Detector

Product Specification Sheet



General


SeaHawk Spot Detectors can be integrated into an alarm monitoring system. Spot detectors are ideal for small spaces, and are the most economical way to detect fluids in confined areas, such as condensation drip pans.

The Spot Detector simulates 15.24 m of SeaHawk water leak detection cable (sensing cable).

Benefits

- Nothing to rust or corrode
- Ensures functionality when submerged in water
- Easily adjusted to desired height
- Simple installation
- Ideal for tight areas

Installation Example

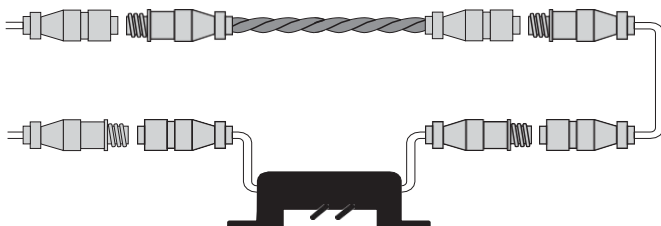

Features

- No exposed metal sensing posts
- Potted electronics
- Adjustable probes
- Can be screwed or rammed to floor or baseboard
- Small footprint/enclosure

Technical Specifications

Length	410 mm; male & female connector
Connections	Compatible with SeaHawk sensing cable (not included) AMP 4-pin circular receptacle
Number of conductors	4
Nominal insulation thickness	0.15 mm
Nominal jacket thickness	0.25 mm
Nominal outer diameter	3.07 mm
Operating Environment	
Temperature	0 °C to 50 °C
Humidity	5% to 95% RH, non-condensing
Altitude	4500 m max.
Storage Environment	-20 °C to 70 °C
Dimensions (H x W x D)	25.4 mm x 50.8 mm x 39.4 mm
Weight	93 g
Certifications	CE; RoHS compliant



www.resideo.com

Ademco 1 GmbH
Hardhofweg 40
74821 Mosbach
Phone: +49 1801 466 388
info.de@resideo.com

homecomfort.resideo.com

@2020 Resideo Technologies, Inc. All rights reserved The Honeywell Home trademark is used under license from Honeywell International Inc. This product is manufactured by Resideo Technologies, Inc and its affiliates.

Honeywell Home