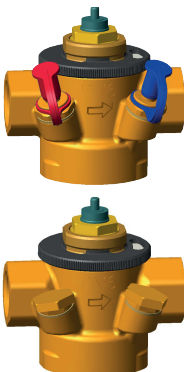


Braukmann

V5005TY ... (DN15...DN25)

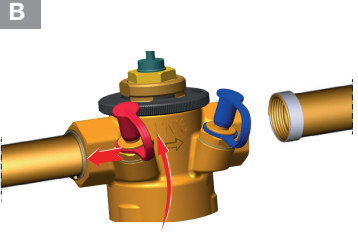
Kombi-FCU




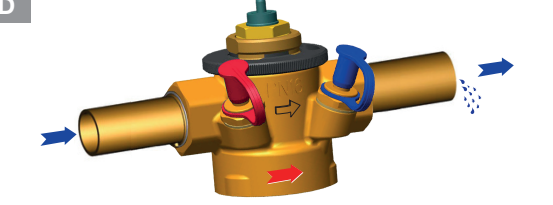
			
 pH 8...9.5 -10...120°C (-14...248°F) p_{max} = 16bar (232 psi) Δp_{max} = 400kPa	V5005TY10150350	25...350 l/h	 
	V5005TY10151000	100...1000 l/h	
	V5005TY10201000	100...1000 l/h	
	V5005TY10201500	200...1500 l/h	
	V5005TY10251000	100...1000 l/h	
	V5005TY10251500	200...1500 l/h	
	V5005TY20150350	25...350 l/h	
	V5005TY20151000	100...1000 l/h	
	V5005TY20201000	100...1000 l/h	
	V5005TY20201500	200...1500 l/h	
	V5005TY20251000	100...1000 l/h	
	V5005TY20251500	200...1500 l/h	

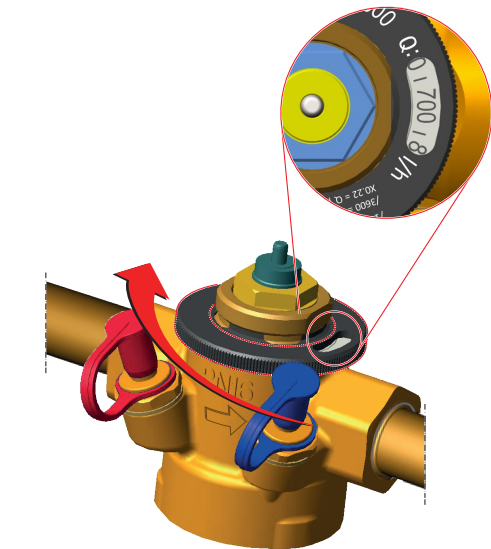


A

B

C

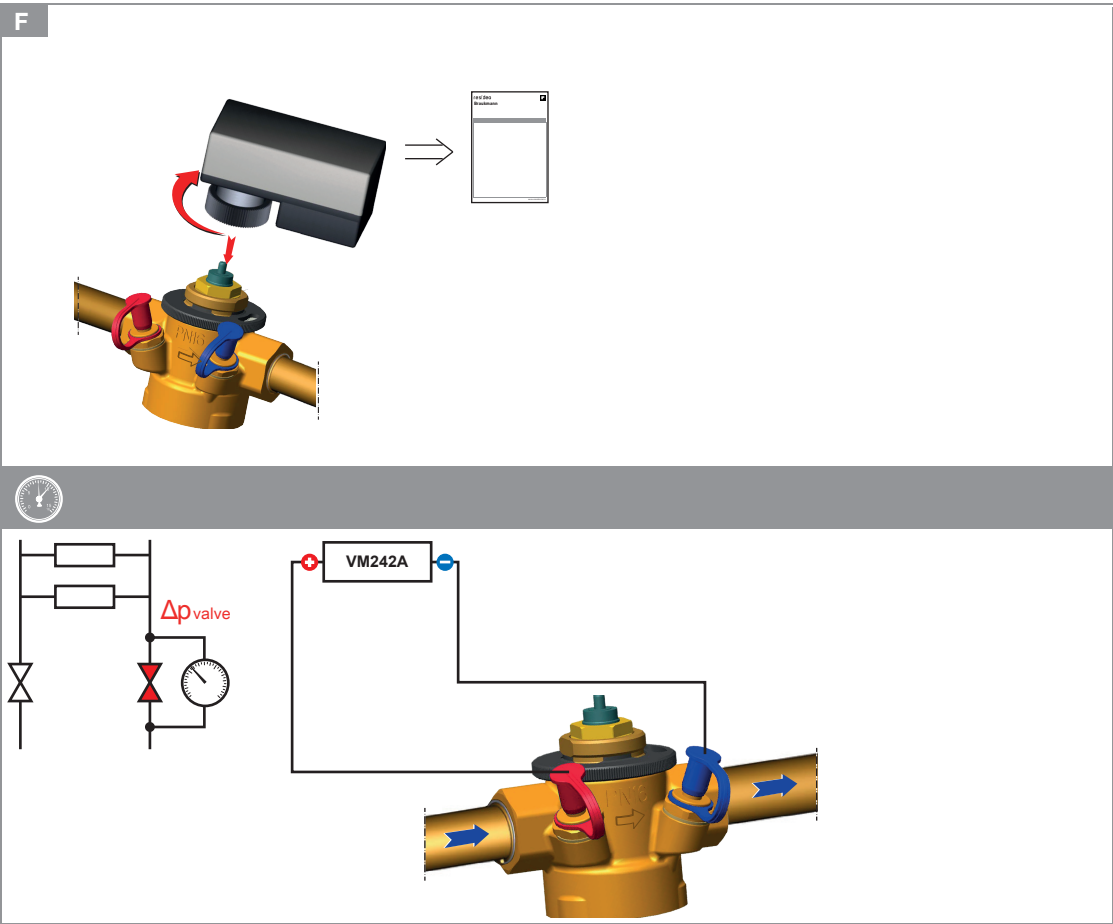
D

E

	Q _{min} ...Q _{max} [l/h]
V5005TY10150350	25...350
V5005TY10151000	100...1000
V5005TY10201000	100...1000
V5005TY10201500	200...1500
V5005TY10251000	100...1000
V5005TY10251500	200...1500
V5005TY20150350	25...350
V5005TY20151000	100...1000
V5005TY20201000	100...1000
V5005TY20201500	200...1500
V5005TY20251000	100...1000
V5005TY20251500	200...1500

R32347508-001

MU1H-2329GE23 R0520



Manufactured for
and on behalf of
Pittway Sàrl, Z.A., La Pièce 4,
1180 Rolle, Switzerland
by its authorised representative
Ademco 1 GmbH

For more information
homecomfort.resideo.com/europe
Ademco 1 GmbH, Hardhofweg 40,
74821 MOSBACH, GERMANY
Phone: +49 6261 810
Fax: +49 6261 81309