



## Braukmann VBG26, MR6

### 6-Way Valve and Actuator for 4-pipe systems

#### APPLICATION

VBG26 ball valves are designed as change-over valve to connect one 2-pipe heat exchanger (Fan-coil Unit or Ceiling) to the 4-pipe system, ideally together with the Kombi-FCU Pressure Independent Control Valve used for dynamic balancing.

The simultaneous rotation of two balls, mechanically connected to the one stem, opens supply and return ways on one side (e.g. cooling) and closes at the same time the other side (heating). That avoids any mixing between flows and reduce potential energy losses.

VBG26 valves are delivered with flow limiter kit in the valve box. That gives flexibility in flow rate adjustment by picking adequate limiter disk with Kv value displayed on. Each Kv value should be written during installation on the label stripped on the valve neck.


VBG26 valves are designed to be actuated by MR6 rotary valve actuators in two types. On/off actuator gives the basic change-over functionality, modulating enables setting mid-position to close the valve. Position feedback on modulating actuator shell can be used for remote system monitoring and system check.

#### SPECIAL FEATURES

- Change-over Valve with scalable flow limitations covering all flow needs with only 3 valve versions
- In combination with modulating actuator option to close the valve in mid-position
- Externally threaded valve versions for easier installation
- Optional use of on/off or modulating actuator
- Modulating actuator with position feedback
- Pre-wired actuator with clear position indication and manual operation
- Can be combined with the Kombi-FCU for high accurate flow control; Ideal connection for 4-pipe systems including hydronic dynamic balancing



#### INSTALLATION EXAMPLE

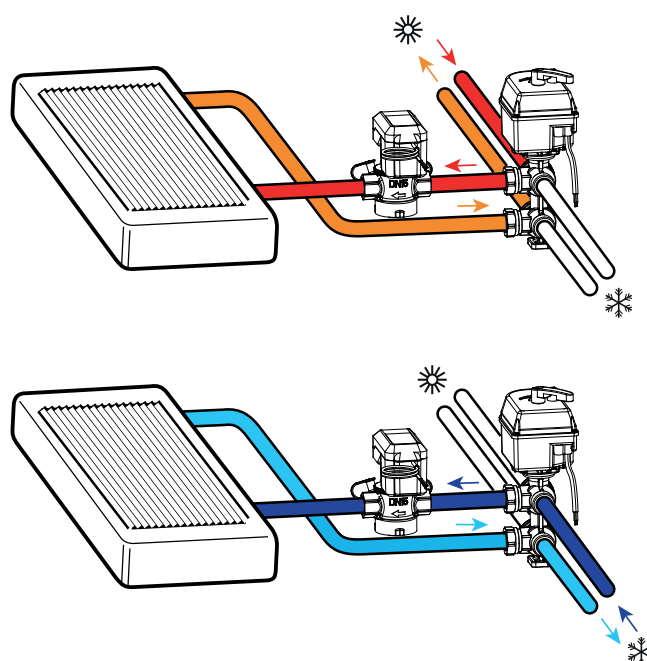


## VALVES VBG26

### Technical Data

Media	
Controlled medium:	Chilled or hot water according to VDI2035 with up to 50 % Glycol (oxygen concentration less than 0.2 g/m <sup>3</sup> , pH 8...9.5; Fe<0.5 mg/kg; Cu<0.1 mg/kg).
Pressure values	
Nominal pressure rating:	PN16
Max. differential pressure:	2bar
Operating temperatures	
Media temperature:	+2°...+110°
Ambient temperature:	0°...+55°

Specifications	
Valve type:	6-way ball valve, change over
Leakage rate:	Class A as per EN12266-1/12 – P12
Total operation angle:	90°
First side operation angle :	0...32°
“Dead zone” operation angle:	32°...58°
Second side operation angle:	58°...90°
Flow characteristic:	linear
Connection/Sizes	
Connection type:	External BSPP, flat sealing

## CONSTRUCTION

Overview	Components	Materials
	<b>1</b> Material body	Brass
	<b>Not depicted components:</b>	
	Inner parts	Brass
	O-rings	EPDM, PTFE, FKM
	Packaging	Separate unit pack

## TECHNICAL CHARACTERISTICS

### kvs-Values

DN size	Kv max:	Kv flow limitation:	Ordering Number
15	1.25	0.25 / 0.40 / 0.63 / 1	VBG26-15
20	2.8	0.7 / 1.0 / 1.6 / 2.1	VBG26-20
20	4.0	2.5	VBG26-20F

### Flow limiters by kv disks

VBG26 valves are supplied with the maximum flow rate defined by Kv max value.

As there is typically heating flow much lower comparing to cooling one the valve should be adjusted on the flow rate.

VBG26 valves are delivered with flow limiter kit in the valve box. That gives flexibility in flow rate adjustment by picking adequate kv disk with Kv value displayed on. Each Kv value should be written during installation on the label stripped on the valve neck.

**VBG26-15**



DN15 Kv <sub>max</sub> 1.25	Kv
1	0.25
2	0.40
3	0.63
4	1.00

**VBG26-20**

DN20 Kv <sub>max</sub> 2.8	Kv
1	0.7
2	1.0
3	1.6
4	2.1

**VBG26-20HF**

DN20 Kv <sub>max</sub> 4.0	Kv
1	2.5

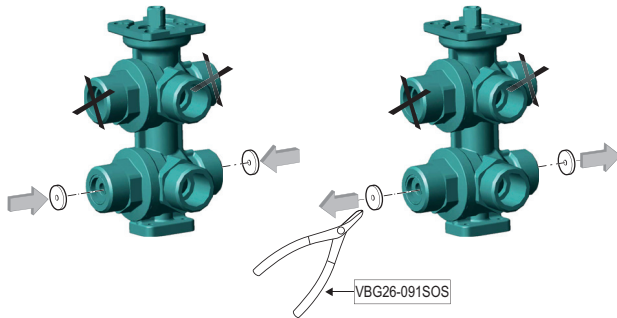




Art. VBG26 - ....

Date: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



Contractor: \_\_\_\_\_

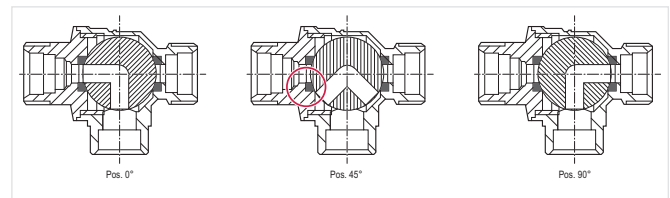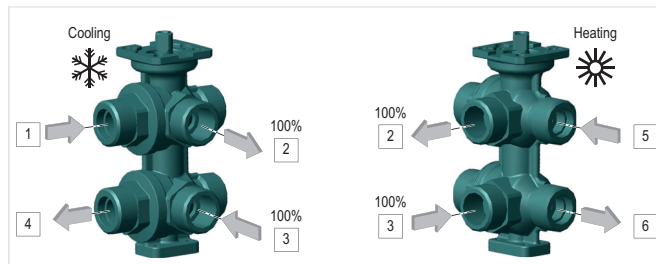**Port connections**

VBG26 valves are designed with integrated pressure relief functional device.


That integrated device prevents systems from potential damages caused by pressure changes when the valve is close (45°) and ambient temperature could heat-up or cool-down close circuit.

The integrated pressure relief device balance potential overpressure in the coils side with the main system pressure when VBG26 valve closes the coil circuit (up to rotations 50°).

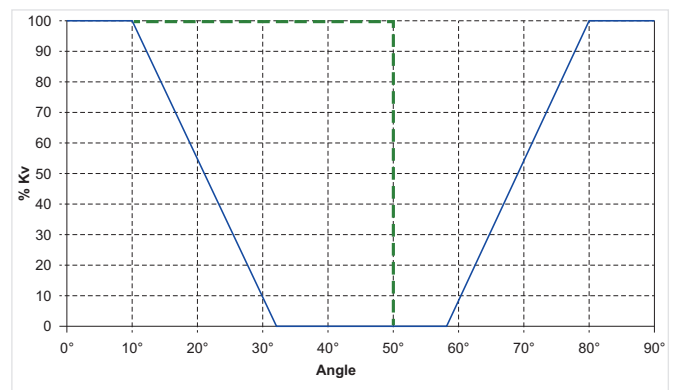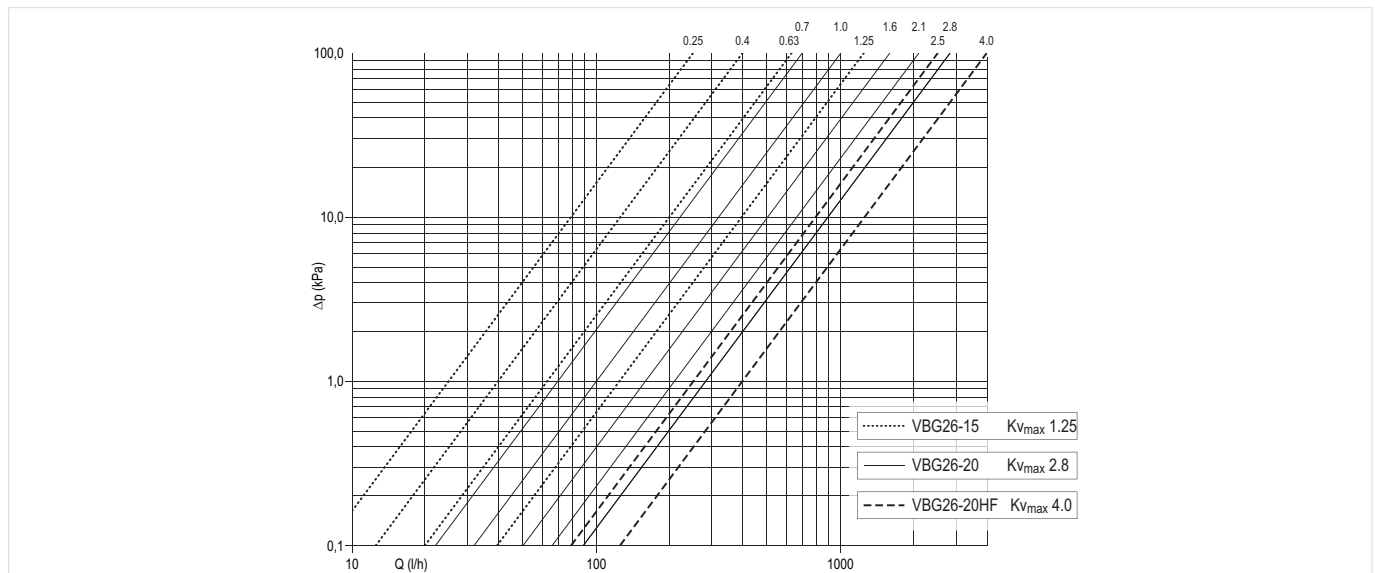**Pressure drop characteristics**

## DIMENSIONS

### Valves

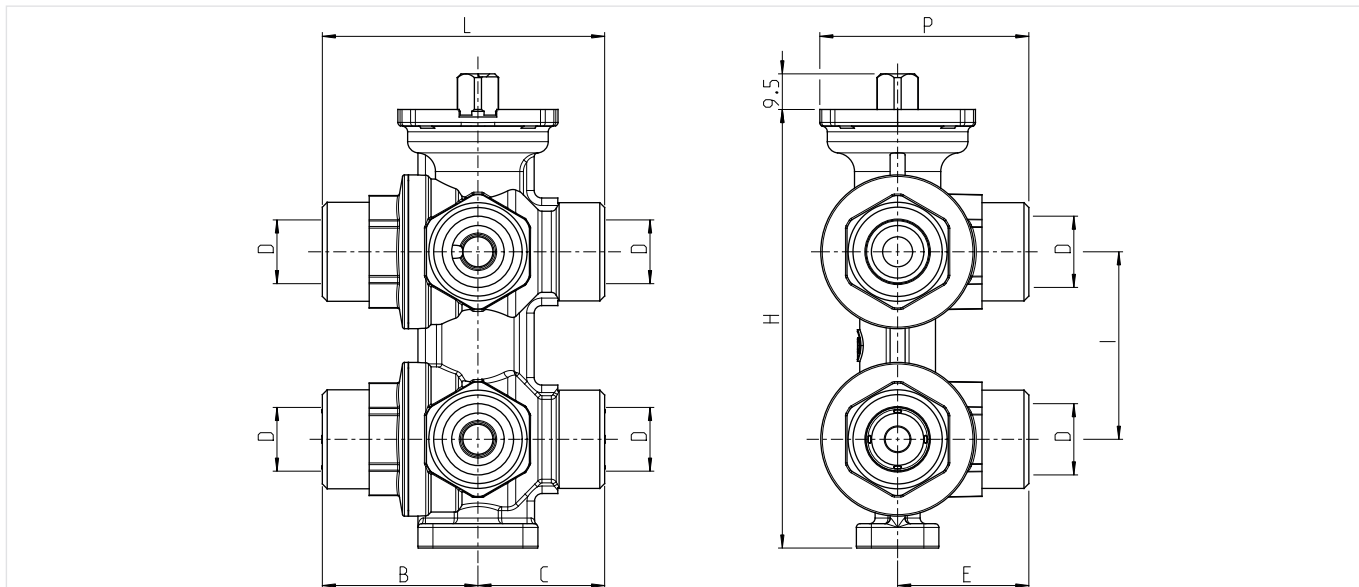




Parameter		Values	
Nominal size diameter:	DN	15	20
Connection	D	G 3/4"	G 3/4"
Dimensions:	B	41.5	47
	C	33.8	39
	E	35	41
	G	G 3/4"	G 3/4"
	H	117	141
	I	50	60
	P	55.9	62
	L	75.3	86

## ORDERING INFORMATION



### Options

Description:	DN:	O.S. no. :
6-way valve; external threads, kv max 1.25; flow limiters 0.25/0.40/0.63/1.00	DN15	VBG26-15
6-way valve, external threads, kv max 2.8; flow limiters 0.7/1.0/1.6/2.1	DN20	VBG26-20
6-way valve, high flow; externals thread, kv max 4.00; flow limiter 2.5	DN20	VBG26-20HF

## Accessories

	Description	Part No.
	<b>Fastening Base for VBG26</b>	
		VBG26-063ZA
	<b>Insulation shell</b>	
	Insulation shell for DN15 type	VBG26-063GI-15
	Insulation shell for DN20 types	VBG26-063GI-20
	<b>Pliers for KV Disks</b>	
		VBG26-091SOS

## Suggested PICV for dynamic balancing


	<b>V5006TY; DN15, DN20</b>	
		V5006TYxxx
	<b>Piping to connect VBG26 to V5005TY DN15</b>	
		ACS-15T

## INSTALLATION GUIDELINES

### Mounting

For more-detailed information on mounting, see the Mounting Instructions supplied with each valve. Please strictly follow flow direction and port connection guidance. Cooling side must be connected to ports "1" and "4"!

The water quality must meet VDI 2035 requirements with max 50% of Glycol.

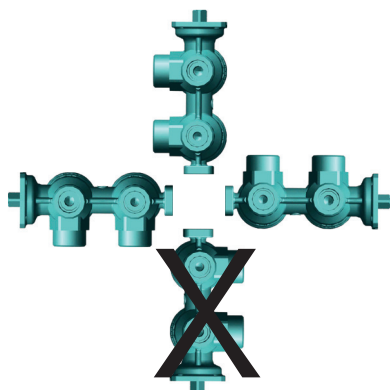

## TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	- 20 °C
Max. ambient temperature:	70 °C
Min. ambient relative humidity:	0 % *
Max. ambient relative humidity:	55 % *

\*non condensing

## ACTUATOR MR6



### Technical Data


Operating temperatures	
Ambient temperature:	1 °C...+55 °C
Media temperature:	-2 °C +110 °C
Specifications	
Actuator type:	Rotary actuator for VBG26
Power supply:	24 VAC +/-15 %, 50 Hz
Control signal:	ON/OFF (MR6-24-2POS); modulating (MR6-24-010)
Power consumption:	see "Actuator types"
Nominal torque:	8 Nm
Operating humidity range:	0 %...80 %, non-condensing
Runtime:	75 sec/90°
Nominal operation angle:	90°
Cable specification:	1 m fixed cable, 3x0.5 mm <sup>2</sup> ; crimped
IP Rating / Protection degree:	IP44
Environmental conditions:	For use in home (residential, commercial, and light-industrial) environments
Protection class:	II
Approvals:	CE

## ORDERING INFORMATION


### Options

O.S. no.	Power supply	Control signal	Power consumption			Cable
			Driving		Holding	
			W	VA	W	
MR6-24-2POS	24 VAC ±15 %; 50 Hz	on/off	3.0	3.0	relay ON 0.6W relay OFF 0W	3 x 0.5 mm <sup>2</sup> 1m length
MR6-24-010	24 VAC ±15 %; 50 Hz	modulating 0 - 10 VDC, 4 - 20 mA Input impedance: 26kΩ (position signal Y)	2.5	2.5	0.3	4 x 0.5 mm <sup>2</sup> 1m length

## DIMENSIONS

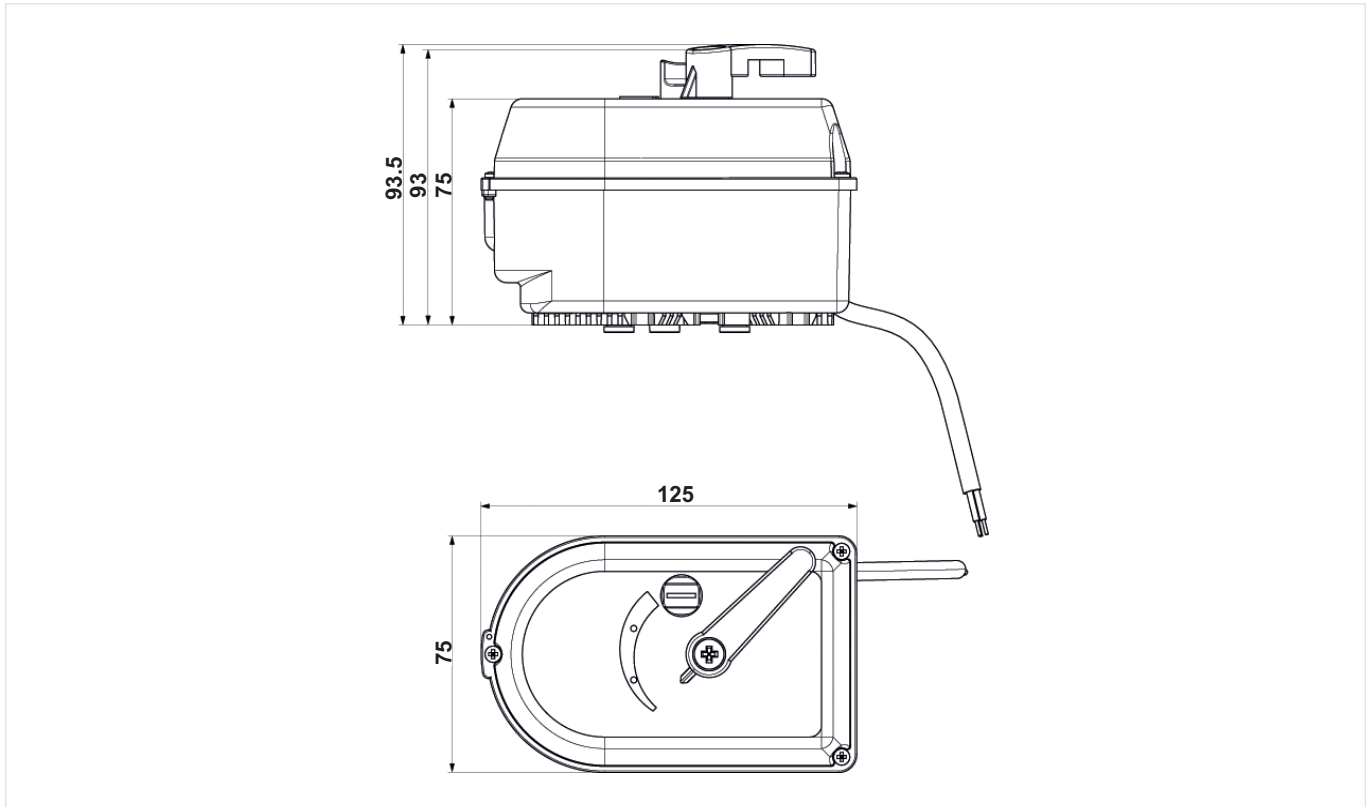


**MR6 with VBG26-15**

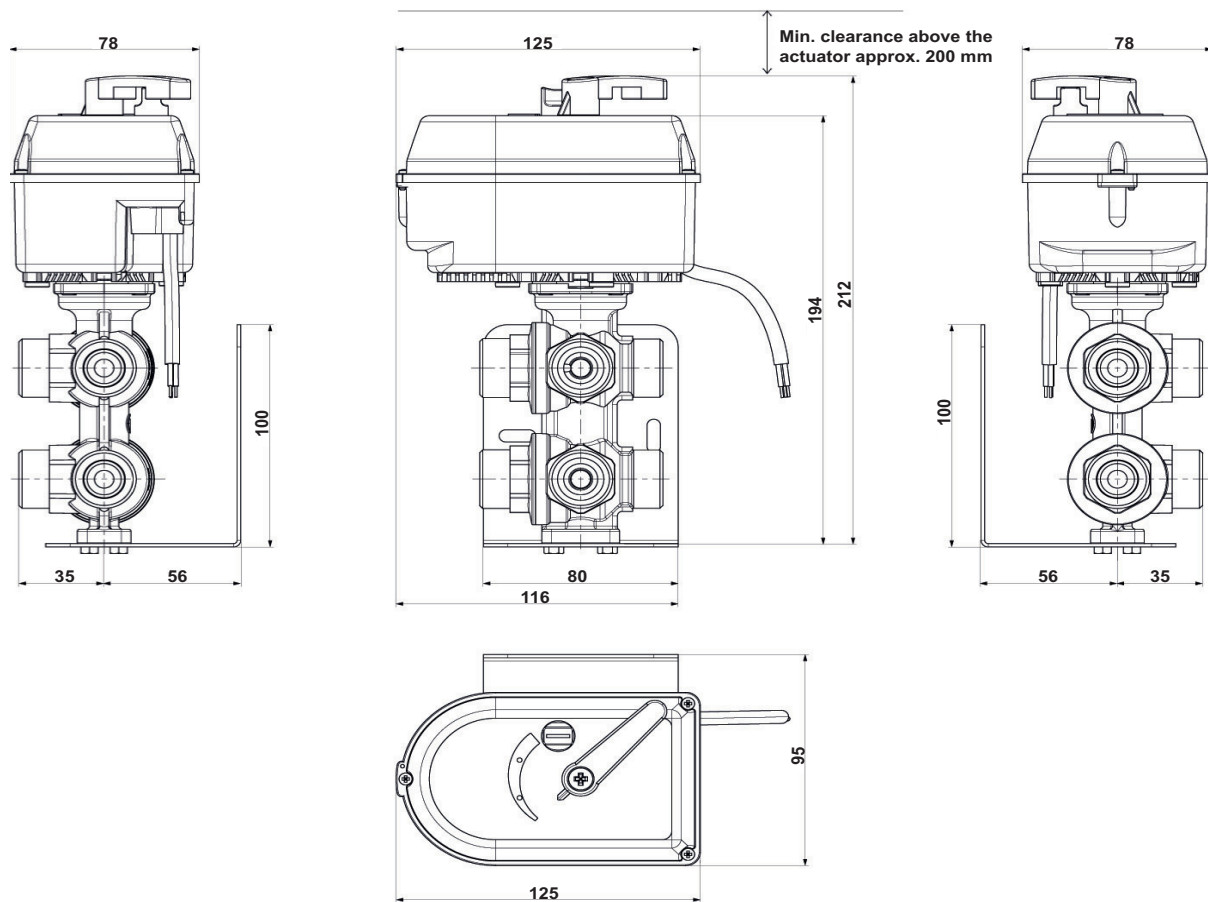



## MR6 with VBG26-20/20HF


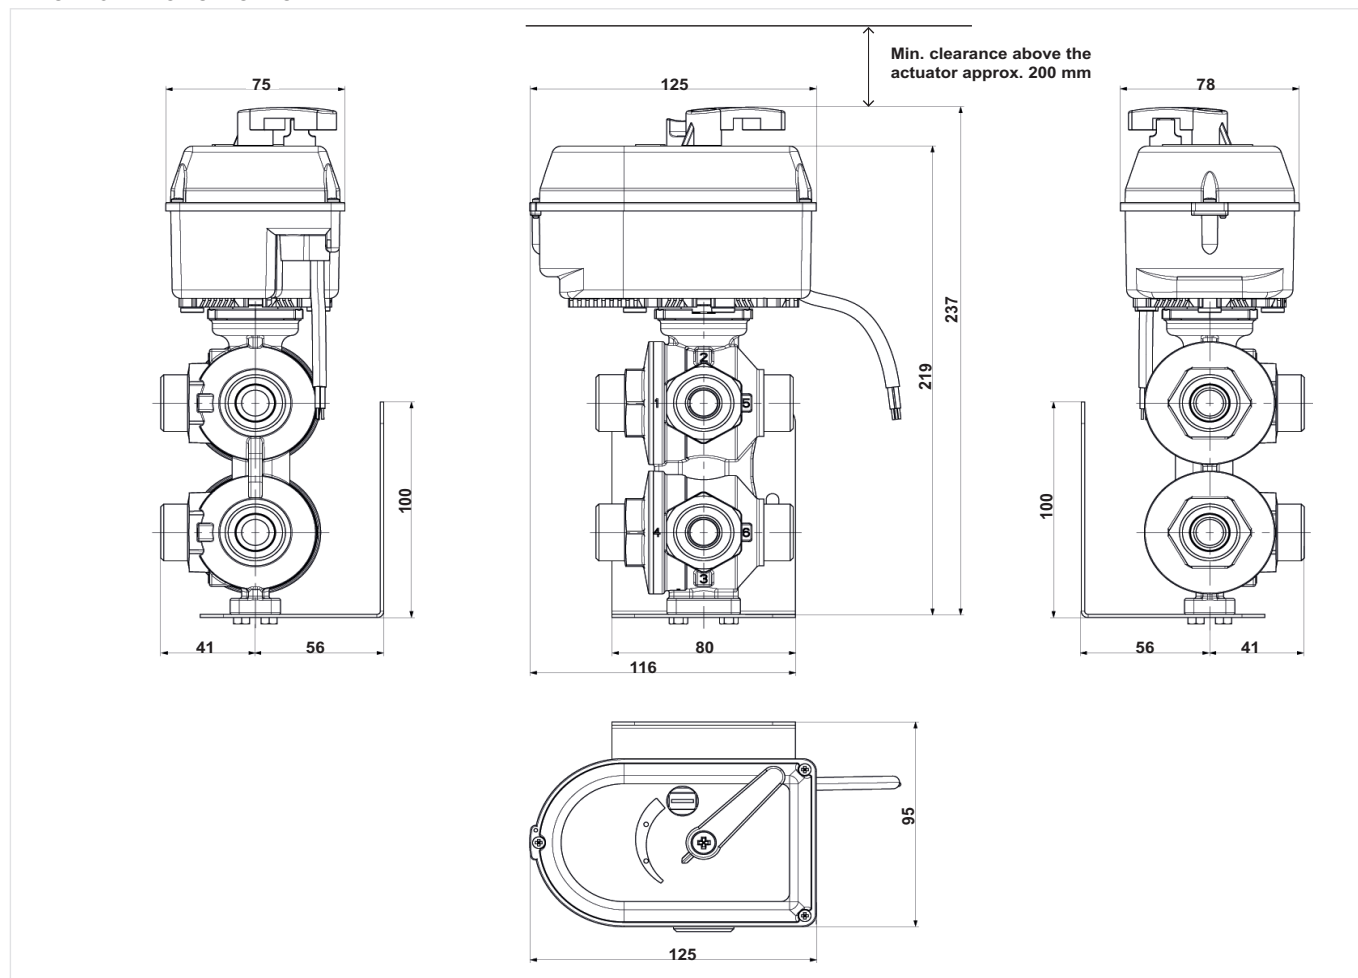


## INSTALLATION GUIDELINES





### Mounting

For more-detailed information on mounting, see the Mounting Instructions supplied with each valve.





Recommendation: Turn the valve actuator at least once a week to avoid sticking the valve in one position

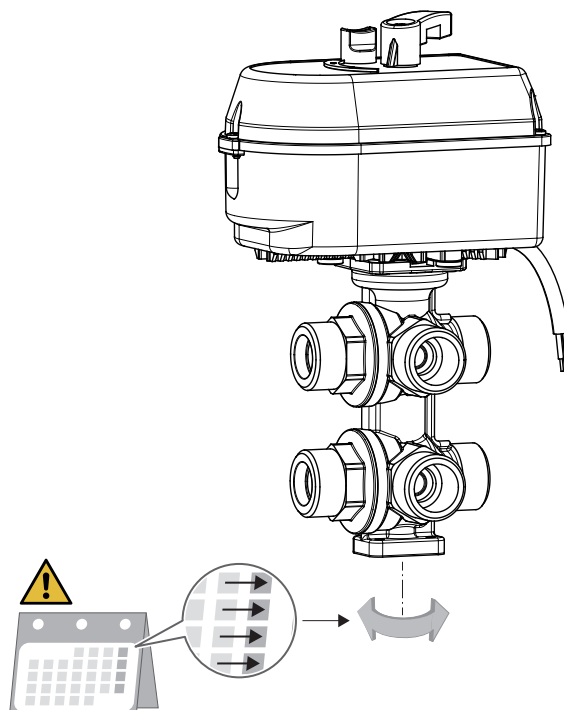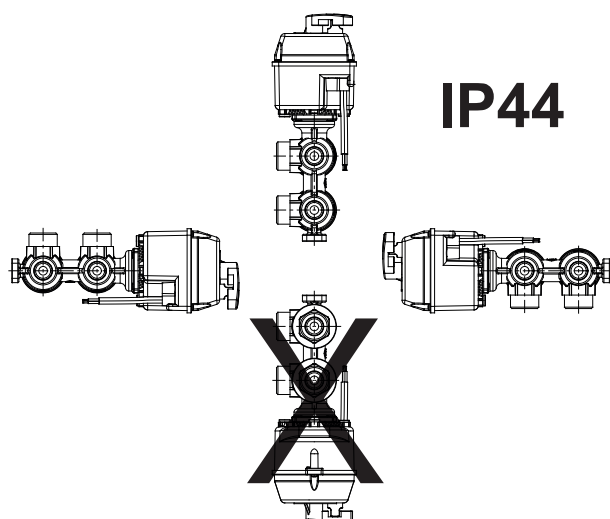

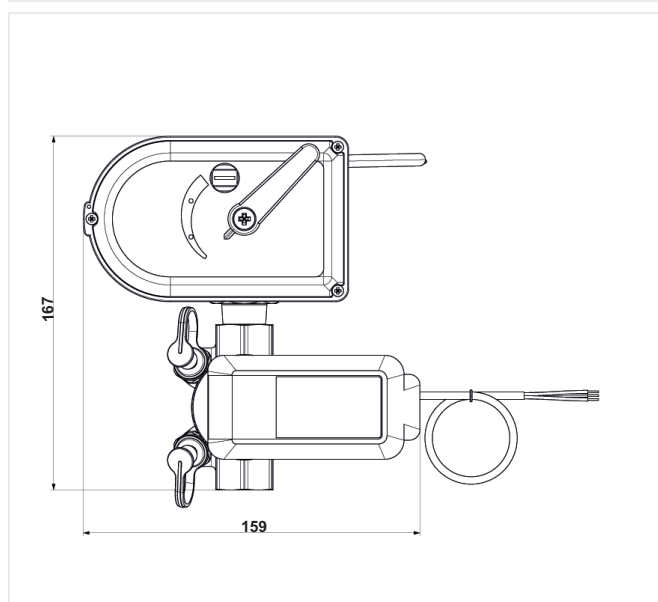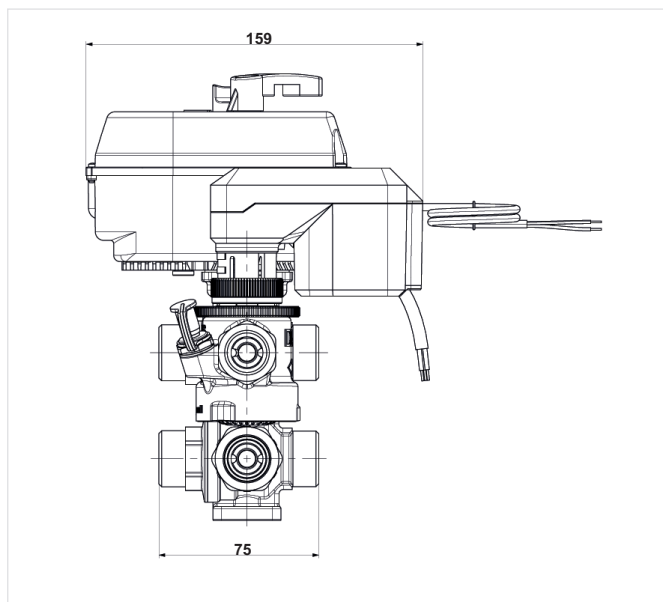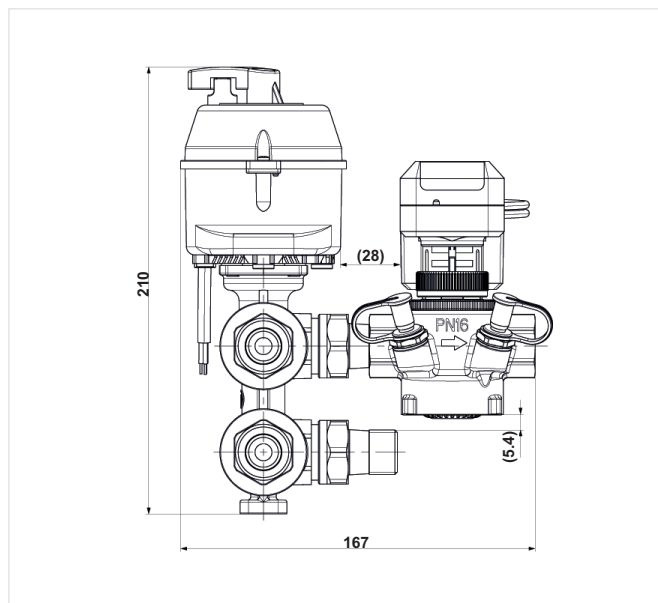
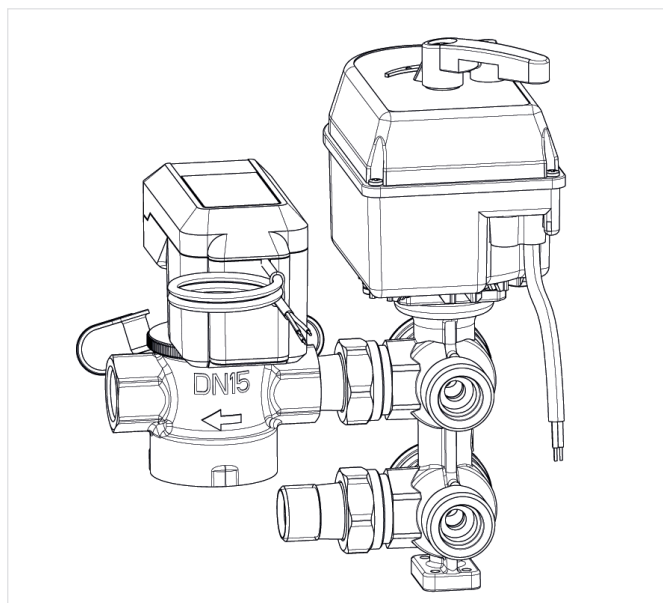


**VBG26-15 with Kombi-FCU DN15 (connected via ACS-15T)****Option 1**



Option 2

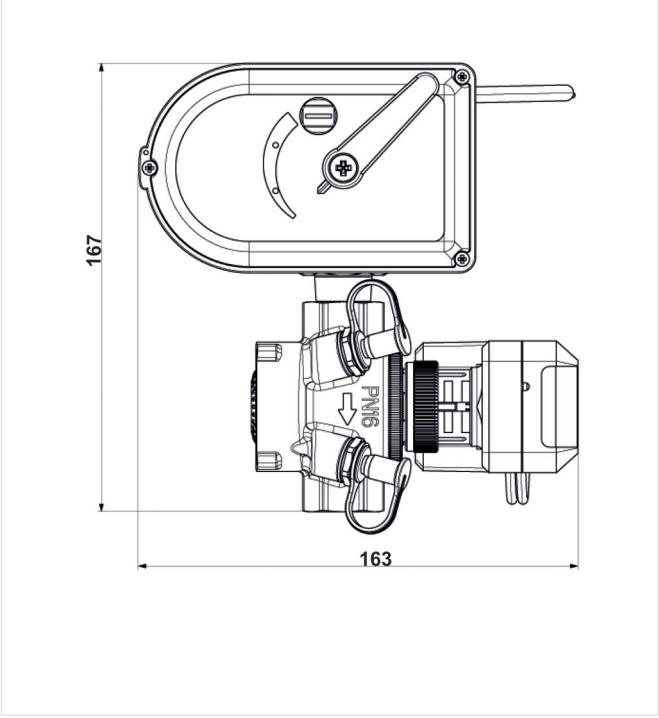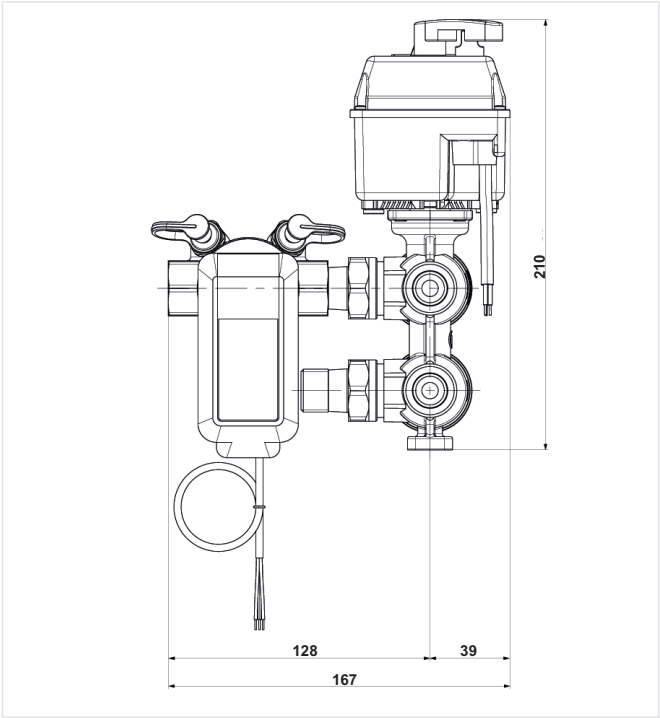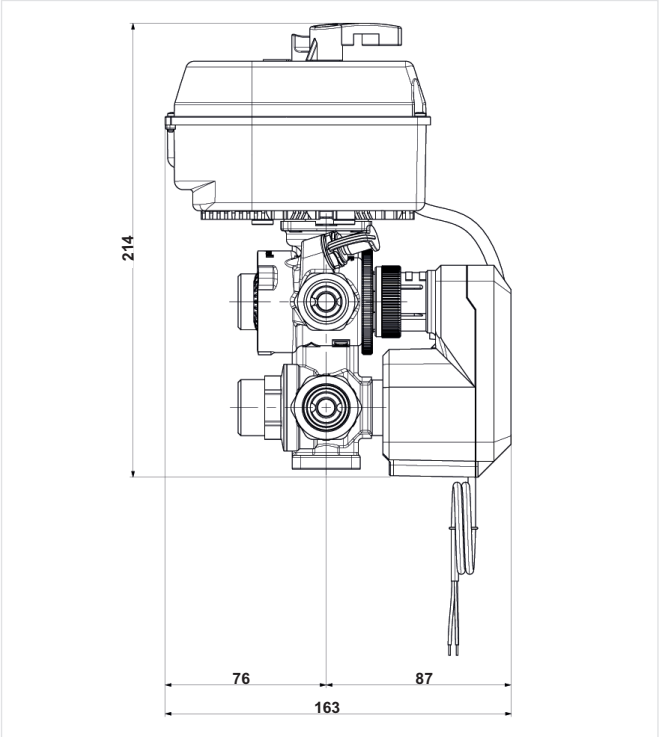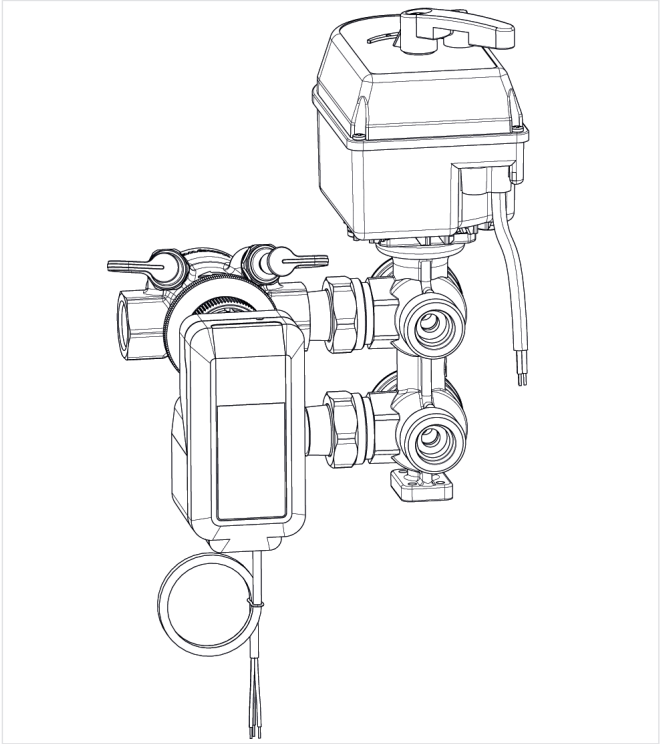


## Electrical Installation

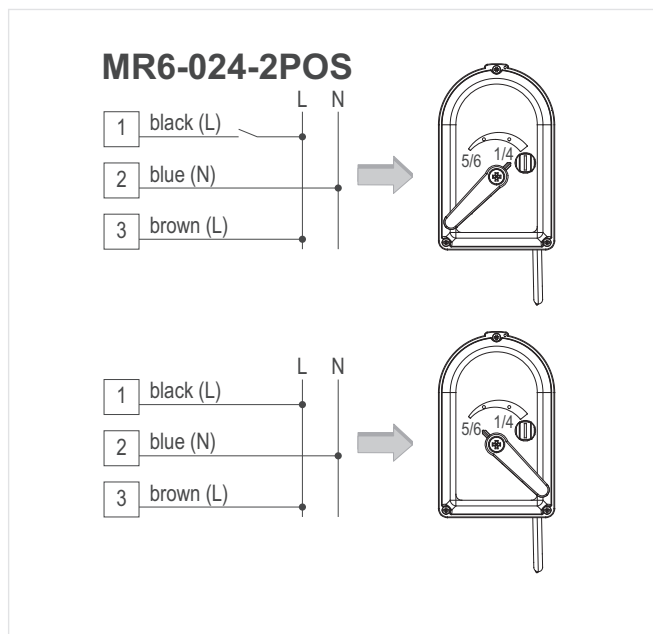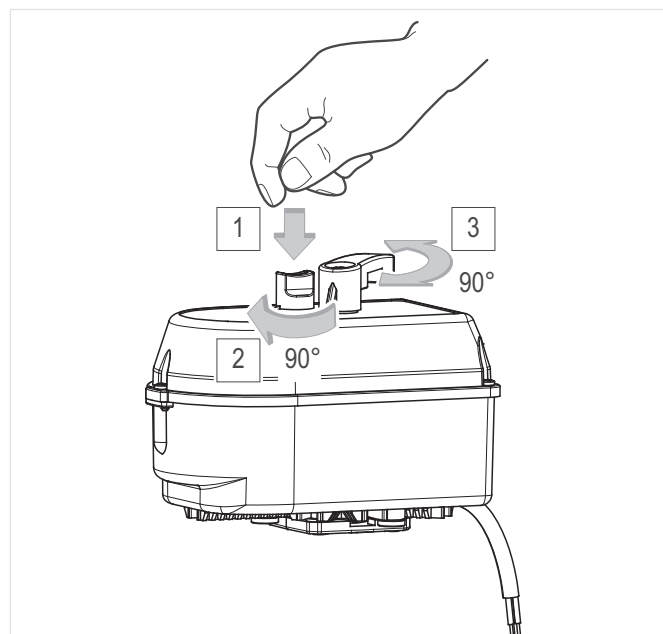

### MR6-024-010

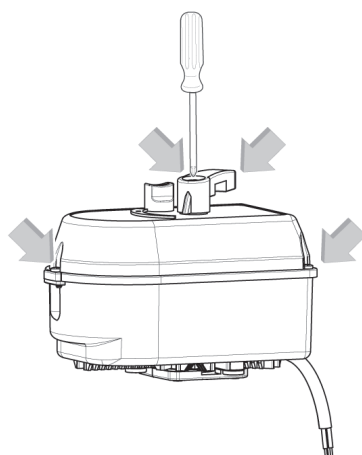

## DIP Switches



DIP	CCW ↺	CW ↻
1	OFF	ON

DIP	↙	↘
2	OFF	ON

DIP	0,16 - 9,84V 0 - 20mA	2 - 9,84V 4 - 20mA	0,16 - 4,88V	5,12 - 9,84V
Con. sig. resolution:	40mV	40mV	40mV	40mV
3	OFF	OFF	ON	ON
4	OFF	ON	OFF	ON

DIP	U(V)	I(mA)
5	OFF	ON



Manufactured for  
and on behalf of  
Pittway Sàrl, Z.A., La Pièce 4,  
1180 Rolle, Switzerland

For more information  
[homecomfort.resideo.com/europe](http://homecomfort.resideo.com/europe)  
Ademco 1 GmbH, Hardhofweg 40,  
74821 MOSBACH, GERMANY  
Phone: +49 6261 810  
Fax: +49 6261 81309