

CM707 PROGRAMMABLE THERMOSTAT

PRODUCT SPECIFICATION SHEET



The **CM707** thermostat is designed to provide automatic time and temperature control of heating systems in villas and apartments.


It can be used as part of a system in conjunction with combi-boilers, oil-burners and gas fired boilers, circulation pumps, thermal actuators, zone valves and electric heat systems (<5A).

The **CM707** is designed with the installer in mind and includes a moulded back-plate with trunking guides and wiring breakouts to make installation quick and easy.


The **CM707** large LCD display, button layout based on the same simple programming philosophy used on our acclaimed CM20 products and the introduction of an 'OK' button makes it easier to install and more user friendly.

The unit is ideal for consumers who want reliable precise temperature control from a modern looking, simple to program and easy to use product.

FEATURES

- Attractive slim, modern styling makes it ideal for location in any type of home.
- 7 day heating program.
- Up to 4 daily independent time and temperature level changes let you set 4 time and temperatures pairs to suit your lifestyle.
- Temporary programmed temperature override to temporarily override the programmed temperature till the next switch point.
-  Holiday button provides energy savings by reducing the temperature from 1 to 99 days when people are on holiday, returning to normal operation (AUTO or MANUAL) on the day of their return.
- Room Temperature Enquiry.
- EEPROM memory holds the user program indefinitely.
- OFF mode has an integral frost protection setting at minimum 5°C (installer adjustable) so that pipes in the house will never freeze in winter.
- 24...230V 5A resistive, 2A inductive SPDT relay provides compatibility with most domestic central heating systems reducing the need to stock many different models.
- Battery powered by 2 x AA size (LR6) alkaline cells.
- Minimum battery life of 2 years with low battery warning indicator.
- Built-in default heating program.
- Surface or wall box mounting options, with trunking guides and wiring breakouts to simplify installation.
- No installer links or special installer switches on the back of the unit mean no adjustment is required for combi-boilers and most domestic central heating systems.
- User Set-Up Mode allows extra functions to be set at the discretion of the user:
 - AM-PM or 24hr time display.
 - Resetting the heating profile to factory default.
- Installer Set-Up Mode allows extra functions to be set at the discretion of the installer to match the consumers applications and needs:
 - Pump Exercise.
 - Upper / Lower Set point Limit Adjust.
 - Temperature offset.
 - Minimum ON time.
 - Cycle rate.
 - Proportional Band Width.
- Diagnostic Mode to assist in fault finding.

CONTROLS/ DISPLAY LAYOUT

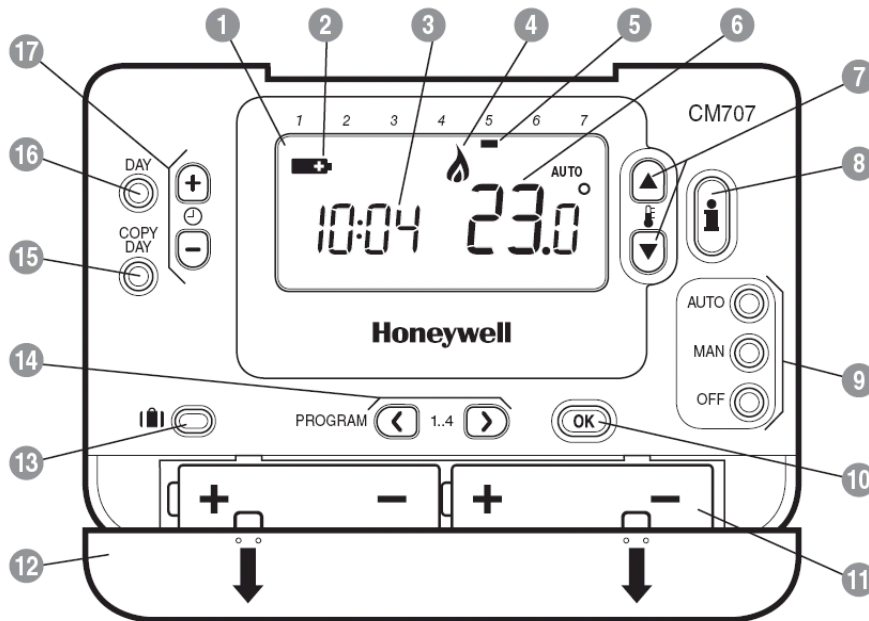

PRODUCT LAYOUT:

1. LCD Screen
2. Battery Low Indicator
3. Time Display
4. Burner On Indicator
5. Day Indicator
6. Temperature Display
7. Temperature Change Buttons
8. Information Enquiry Button
9. Operating Mode Buttons
10. Green OK Button
11. Battery Compartment
12. Battery Cover
13. Holiday Function Button
14. Program Buttons
15. Copy Day Button
16. Day Select Button
17. Time Change Buttons

SPECIFICATIONS



| | |
|---------------------------|---|
| Batteries | : 2 x 1.5 V IEC LR6 (AA) Alkaline cells |
| Battery life | : Minimum 2 years |
| Battery replacement | : Program retained in EEPROM |
| Switch type | : SPDT (potential free) |
| Electrical rating | : 230 V~, 50...60 Hz, 0.1 A to 5 A resistive 0.1 A to 2 A inductive (0.6 pf) 24 V~, 50...60 Hz, 0.5 A to 5 A resistive 0.5 A to 2 A inductive (0.6 pf) |
| Time display | : 24 hour or 12 hour AM/PM format |
| Time keeping accuracy | : Typically better than 10 minutes per year |
| Program | : 7 day with 4 daily time and temperature level changes |
| Time setting resolution | : Time of day - 1 minute Program - 10 minute steps |
| Sensing element | : 100K (@ 25°C) NTC thermistor |
| Temperature setting range | : Program : 5 to 35°C in 0.5 °C steps Frost : 5 °C or equal to lower limit (5 °C to 21 °C). |

| | |
|--------------------------------|--|
| Temperature control accuracy | : ±0.5 K (nominal) @ 20°C, 50% load 3 K Δ/hour |
| Room Temperature display range | : From 0°C to 50°C |
| Control form | : P + I (Proportional + Integral) |
| Minimum ON time | : 10% of cycle time (min one minute), adjustable to 2 to 5 min (see installer set up) |
| Cycle rate | : Selectable by application (see installer set up) |
| Wiring | : Terminal block capable of accepting wires up to 2.5 mm ² |
| Wire access | : Mains wiring – rear right. Low voltage wiring – rear right. |
| Dimensions | : 133 x 88.5 x 26 mm (w x h x d) 133 x 175 x 26 mm (w x h x d) (flap open) |
| Environmental | : Operating temperature range 0 to 40°C Shipping and storage temperature range -20 to 55°C Humidity range 10 to 90% rh, non-condensing |
| Approvals | : Designed to meet European EN approvals EN60730-1 (Nov 2000), EN55014-1 (1997), EN55014-2 (2000) |

INSTALLER SET-UP

To enter the installer set-up mode:

- Press the **OFF** button.
- Press and hold the **INFO i** button and the two program buttons '<' >' together.
- The unit will display the first parameter of installer parameter group category 1 (from n.1 to n.19).
- Press the **TEMP ▲** or **▼** buttons to change the factory setting. The display will flash indicating that a change has been made.
- Press the green **OK** button to confirm this change and the display will stop flashing.
- Press the **⌚ +** button to go to the next parameter.
- Press the program button **>** to go to category 2 in the Installer mode (from n.1 to n.5).
- To exit the installer mode, press the **AUTO**, **MAN** or **OFF** buttons.

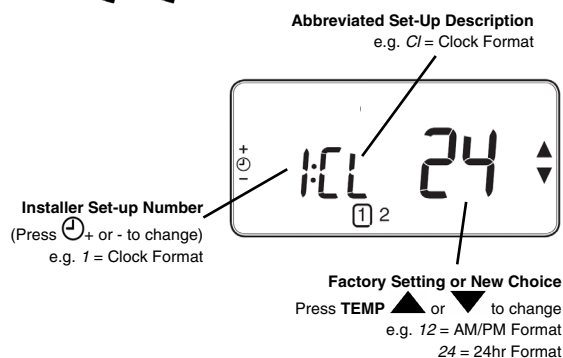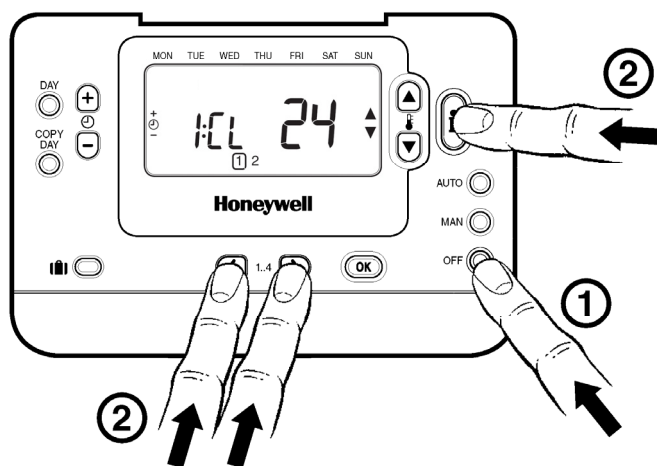

In Installer set-up we can:


- Set-up specific applications
- Enable special features

| Specific Applications | | Setting | | What do you need to change? |
|-----------------------|---|-------------|------------------------------|--|
| | | Cycle/ Hour | Minimum ON time (in minutes) | Note : a. To change Cycle/Hour, please go to parameter n. 2, category 2 in the installer set-up mode. b. To change Minimum ON Time, please go to parameter n. 1, category 2 in the installer set-up mode. |
| Heating | Gas Boilers (<30KW) | 6 | 1 | No action required |
| | Oil Boiler | 3 | 4 | 1. Set Minimum ON Time to 4 minutes. 2. Set Cycle/Hour to 3. |
| | Thermal Actuator | 12 | 1 | Set Cycle/Hour to 12. |
| | Zone valve | 6 | 1 | No action required. |
| | Electric heating (for applications <5A) | 12 | 1 | Set Cycle/Hour to 12. |


| Special Features | Description | What to do if we wish this feature |
|-------------------------|--|---|
| AM-PM/ 24hr Display | Change display format (default 24hr). | Set parameter n.1, category 1 in the installer set -up mode to 12. |
| Pump exercise | When enabled the Pump Exercise will switch the relay on for 1 minute at 12:00 if the relay has not been switched on since 12:00 the previous day. While in Holiday mode the Pump Exercise feature, if enabled, will operate. | Set parameter n.5, category 2 in the installer set -up mode to 1. |
| Upper Temperature Limit | The normal upper temperature limit of 35°C can be reduced down to 21°C to save the homeowner energy. Useful if the homeowner rents to tenants. | Set parameter n.6, category 1 in the installer set -up mode to the desired limit. |
| Lower Temperature Limit | The normal lower temperature limit of 5°C can be increased up to 21°C to protect the inhabitants from cold. Useful if the inhabitants include the elderly, children or disabled. | Set parameter n.7, category 1 in the installer set -up mode to the desired limit. |
| Temperature Offset | If the thermostat is located in a hot/cold location and cannot be moved because of wiring then the measured/ displayed temperature can be adjusted by +/- 3°C. Useful if the homeowner wants the reading to match another appliance temperature display. | Set parameter n.12, category 1 in the installer set -up mode to the desired offset value. |
| Proportional Band Width | Can be adjusted up to 3°C (default is 1.5°C) to provide better temperature control (less overshoot). Useful for: a. Well insulated homes with over-sized heating systems. b. Air systems with fast response. | Set parameter n.13, category 1 in the installer set -up mode to the desired value. |

| Parameter | Installer Set-Up Number / Abbreviation (Press + or - keys to select) | Factory Setting | | Optional Setting | | Installer Set-Up Category (Press PROG keys '<' or '>' to select) |
|---|---|-----------------|--|------------------|---|---|
| | | Display | Description | Display/Setting | Description | |
| Category 1: Thermostat Parameters | | | | | | |
| AM-PM / 24hr Display | 1:Cl | 24 | 24 hr clock display | 12 | 12 hr AM / PM clock display | 1 |
| RESET Time / Temperature Program | 2:rP | 1 | Time / Temperature profile set to factory default Changes to 0 when one of the time/temp profiles are changed | 0 1 | Time / Temperature are as programmed To restore the factory profile set to 1 | 1 |
| Upper Temperature Limit | 6:uL | 35 | 35°C Upper Temp. Limit | 21 to 34 | 21°C to 34°C adjustment in 1°C steps | 1 |
| Lower Temperature Limit | 7:LL | 5 | 5°C Lower Temp. Limit | 6 to 21 | 6°C to 21°C adjustment in 1°C steps | 1 |
| Temperature Offset | 12:tO | 0 | No offset | -3 to +3 | -3°C to +3°C adjustment in 0.1°C steps | 1 |
| Proportional Band Width | 13:Pb | 1.5 | 1.5°C Proportional Band | 1.6 to 3.0 | 1.6°C to 3.0°C adjustment in 0.1°C steps | 1 |
| Reset Parameters to Factory Defaults | 19:FS | 1 | All settings held are the factory defaults. Changes to 0 when one of the parameter values are changed | 0 1 | Settings are as modified above To restore the factory profile set to 1 | 1 |
| 'Category 2: System Parameters (You must press the '>' program key to enter this section) | | | | | | |
| Minimum ON Time | 1:Ot | 1 | 1 minute minimum ON time | 2 to 5 | 2 - 2 minutes 3 - 3 minutes 4 - 4 minutes 5 - 5 minutes | 2 |
| Cycle Rate | 2:Cr | 6 | 6 cycles per hour (cph) for gas boilers, zone valves and fan-coil | 3, 9, 12 | 3 - 3 cph 9 - 9cph 12 - 12 cph | 2 |
| Pump Exercise | 5:PE | 0 | Pump Exercise Disabled | 1 | Pump Exercise Enabled | 2 |

DIMENSIONS

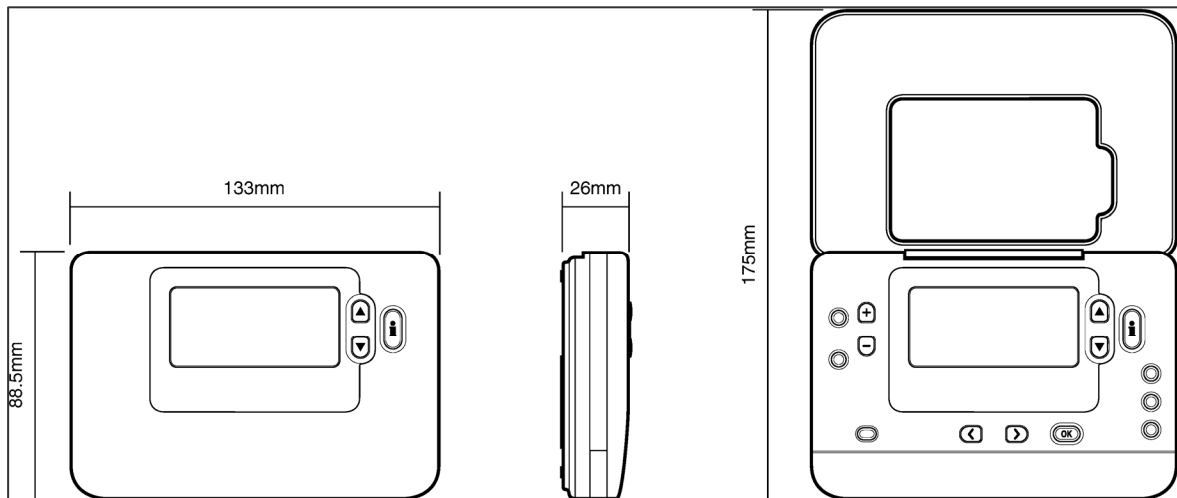

INSTALLATION

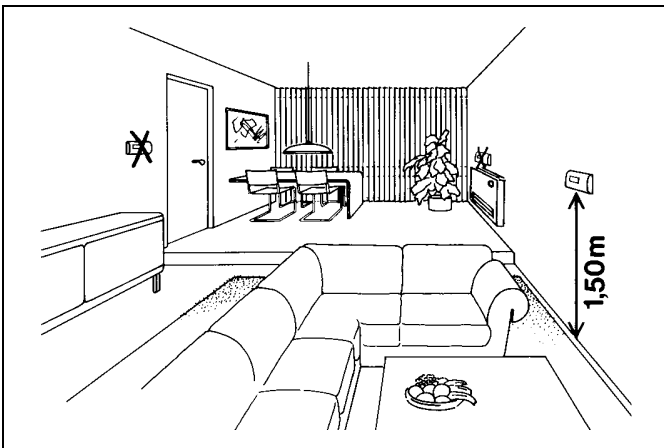

LOCATION

The **CM707** thermostat is the control element of the heating system and, therefore, **MUST** be located in a position with good air circulation, at average room temperature and on an inside wall, 1.5 metres above the floor level. Do not position the **CM707** thermostat near sources of heat (radiators, hot air vents, TV or lights), near doors or windows, or in direct sunlight.

MOUNTING

The **CM707** thermostat can be mounted directly on the wall surface or on to an electrical wall box.


WIRING

The **CM707** thermostat is designed for fixed wiring only and must be installed in accordance with the latest I.E.E. regulations. Ensure the wiring connection to the supply is via a fuse rated at no more than **5 amps** and a Class "A" switch (having contact separation of at least 3 mm in all poles).

IMPORTANT

1. The installer must be a trained service engineer.
2. Disconnect the power supply before beginning installation.

WIRING

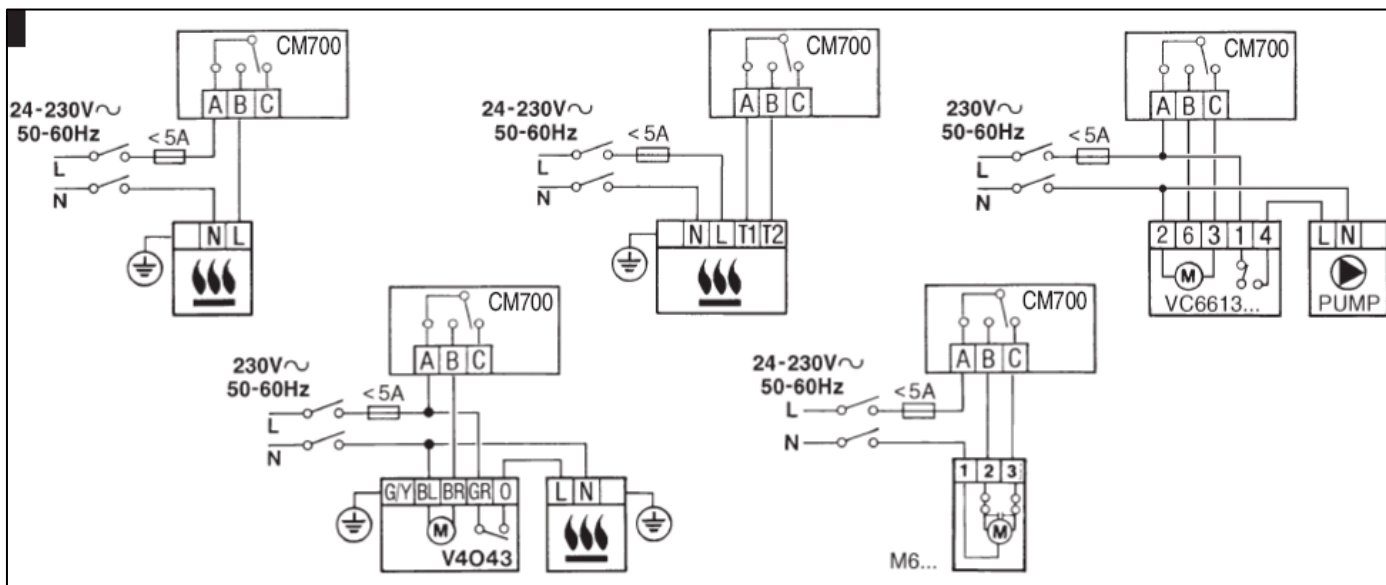

ORDERING SPECIFICATION

| Description | Model | Logo | Literature | Availability | Spec Sheet |
|-------------------------------|--------------------|-----------|---|---------------|-----------------|
| 7-day programmable thermostat | CMT707A1003 | Honeywell | French, Dutch, Italian, Spanish, German, Portuguese. | Aug 05 | ENOH8544 |
| | CMT707A1011 | Honeywell | Czech, Polish, Slovakian, Hungarian, Romanian, Russian. | Aug 05 | ENOH8544 |
| | CMT707A1037 | Honeywell | English, Greek, Turkish, Croatian, Slovenian. | Nov 06 | ENOH8544 |

Honeywell

Honeywell Control Systems Limited
 Newhouse Industrial Estate
 Motherwell ML1 5SB
 United Kingdom

<http://europe.hbc.honeywell.com>